


MODEL RTA-733DL


ASSEMBLY INSTRUCTIONS

Thank you for purchasing our product.

Option A

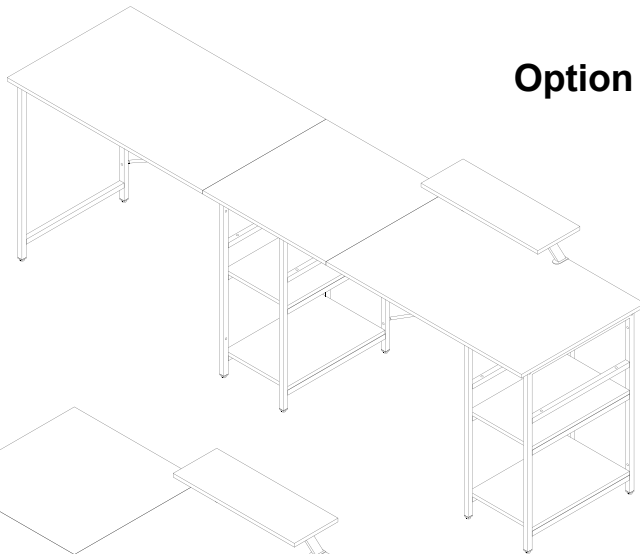

Option B

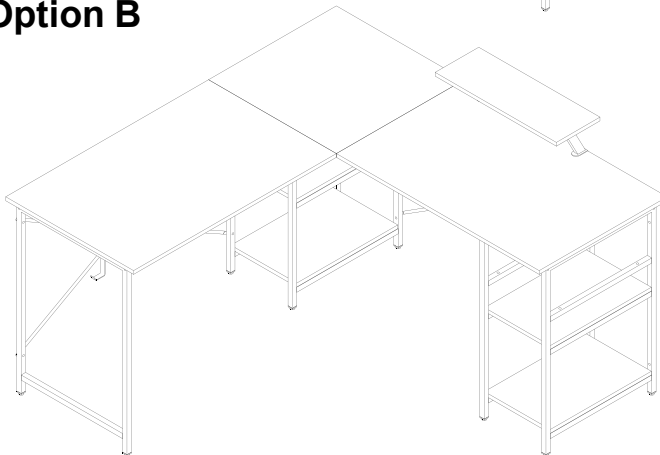

REV.PFT-6378-0222-0



P.1	RTA-733DL	P.1
-----	-----------	-----



- Please read carefully the assembly instructions before the installation.


















- Do not discard this manual or any of the packaging material until the unit has been completely assembled.




- Might require two people.


P.2	RTA-733DL	P.2
-----	-----------	-----

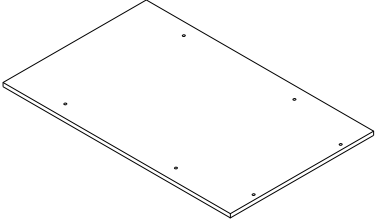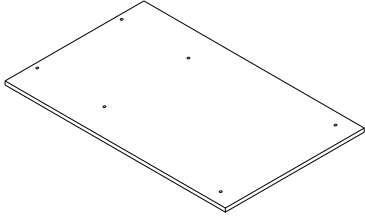MAIN PARTS LIST			
1 x1 Left tabletop 	2 x1 Corner top 	3 x1 Right tabletop 	
4 x4 Shelf 	5 x1 Adjustable top shelf 	6 x1 Left frame 	
7 x3 Right and center-right frame 	8 x1 Center-left frame 	9 x1 Left-top-back tube 	
10 x1 Left-top-front tube 	11 x1 Right-top-back tube 	12 x1 Right-top-front tube 	
13 x2 Long cross tube 	14 x2 Short cross tube 	15 x2 Stand support 	16 x1 Earphones hook 

MAIN PARTS LAYOUT (FOR REFERENCE):

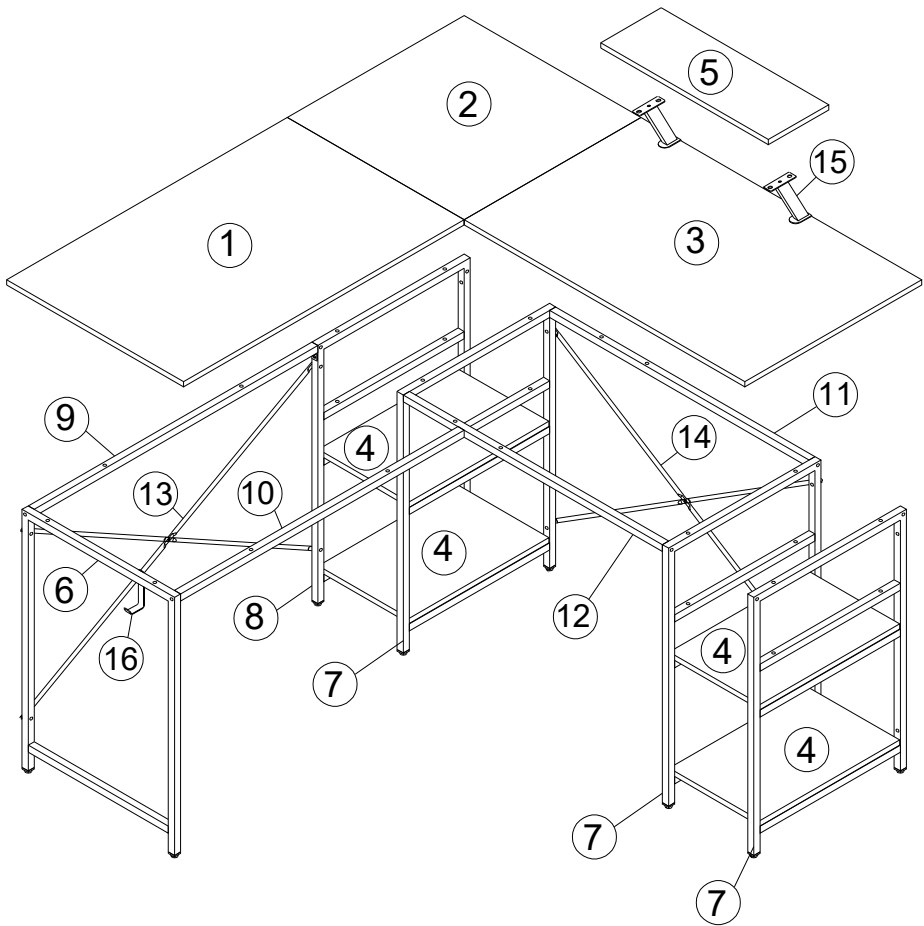

LIST OF HARDWARE, SCREWS AND FITTINGS


PART	QTY	ITEM		PART	QTY	ITEM	
A	8	M6x12		F	2	30x25mm Protector	
B	43	M6x30		G	1	25x25 Bracket	
C	7	M6x40			1	M4 Allen wrench	
D	11	M6 Nut cap			1	Wrench (Spanner)	
E	2	M6 Screw knob					

BEFORE YOU START THE ASSEMBLY, PLEASE READ THE FOLLOWING TIPS AND WARNINGS.

1 Do a quick inventory to make sure the package contains all the parts and hardware listed in the assembly instructions.




7 To avoid misalignments, always leave the screws loose and tighten them until all pieces are positioned correctly.



2 Missing, damaged and defective parts can be replaced at no cost to you. Please refer to the last pages on this manual.



8 Do not overtighten or force the screws as they might break, strip, damage the threads of the holes or get stuck inside the part.



3 The replacement parts service is limited to the 48 contiguous United States. If you reside in Alaska, Hawaii, Puerto Rico, U.S. territories or other countries, please contact the supplier from where the unit was purchased.



9 Sometimes the laminate might cover partially or entirely the hole on a panel. If there is no visible hole for the screw, pass and press the tip of your finger over the area where the hole should be located to feel the indentation, and once found, carefully pierce the laminate to reveal the hole underneath.



4 If during assembly you find an issue or need clarification, please contact our Customer Service for assistance. Please refer to the last pages on this manual.




5 On each step read the instructions and analyze the illustrations thoroughly before proceeding to do the assembly.



10 If the hole seems too small for the screw, first make sure you are using the correct size of screw and that it's been installed in the correct hole. If the hole still appears to be too small, carefully pierce the laminate to reveal the hole's actual size.





6 Make sure you understand which hardware will be used on each step. Using the wrong size of screw, bolt or pin might strip the threads or cause damage to the part in which it is being used.



ASSEMBLY STEPS



STEP 1		
Hardware:		
B	 M6x30	8 Pcs
		

- Assemble one of the shelves **4** to the bottom bars on the right frames **7** with screws **B** from underneath.
- Assemble another shelf **4** to either set of middle bars on the frames **7** with screws **B** according to your preference, or calculating enough space if you intend to put your CPU unit on the bottom shelf.

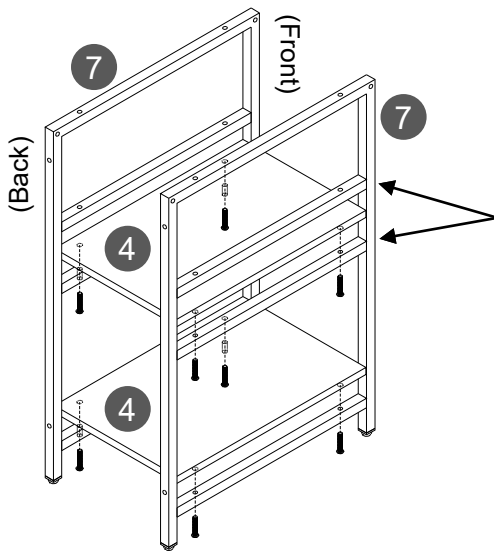

STEP 2		
Hardware:		
B	 M6x30	8 Pcs
		


- Assemble another shelf **4** to the frames **7** and **8** with screws **B** from underneath, making sure the frame **7** stays on the LEFT and the frame **8** on the RIGHT.
- Assemble the last shelf **4** to either set of middle bars on the frames **7** and **8** with screws **B** according to your preference, or calculating enough space if you intend to put your CPU unit on the bottom shelf.

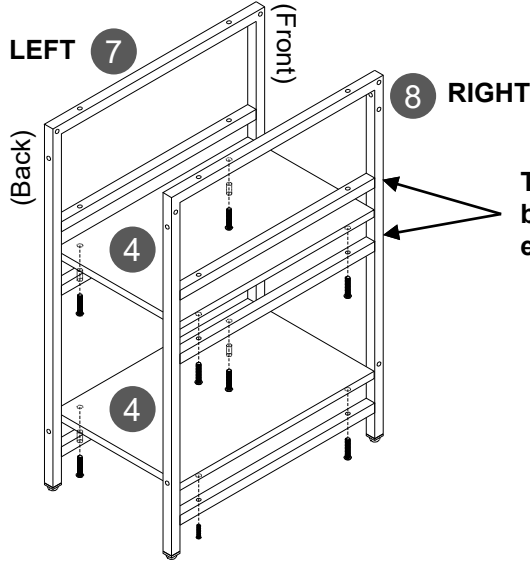



STEP 3		
Hardware:		
C	 M6x40	4 Pcs
		




- Assemble the right-top-back tube **11** and the right-top-front tube **12** in between the frames **7** in their corresponding positions with screws **C**.
- Pay attention to the orientation of the holes on the frames and tubes.

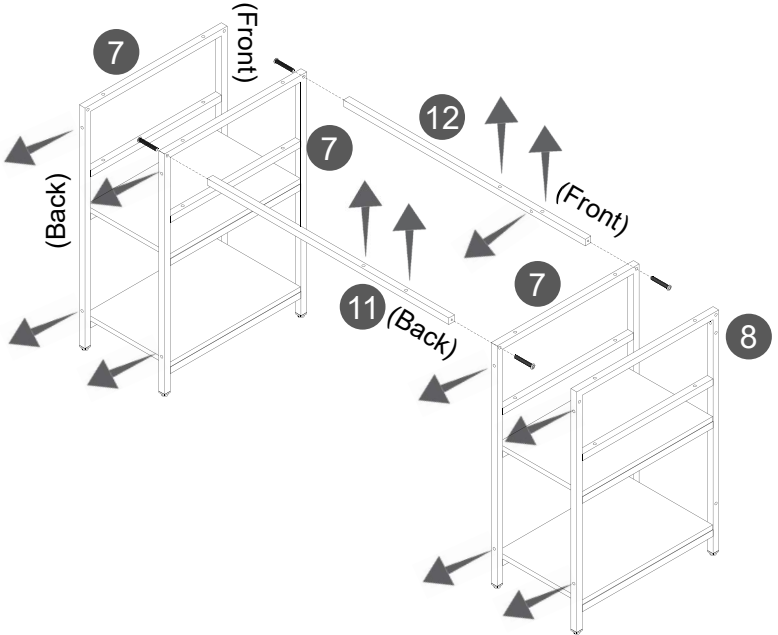


STEP 4		
Hardware:		
A	 M6x12	1 Pc
B	 M6x30	4 Pcs
D	 M6 nut cap	5 Pcs
		
		




- Join the short cross tubes **14** to each other in the center with screw **A** and nut cap **D**, but leave them loose.
- Attach the cross tubes **14** to the frames **7** with screws **B** and nut caps **D**. The caps go on the inside of the unit.
- Tighten all the screws and nut caps.

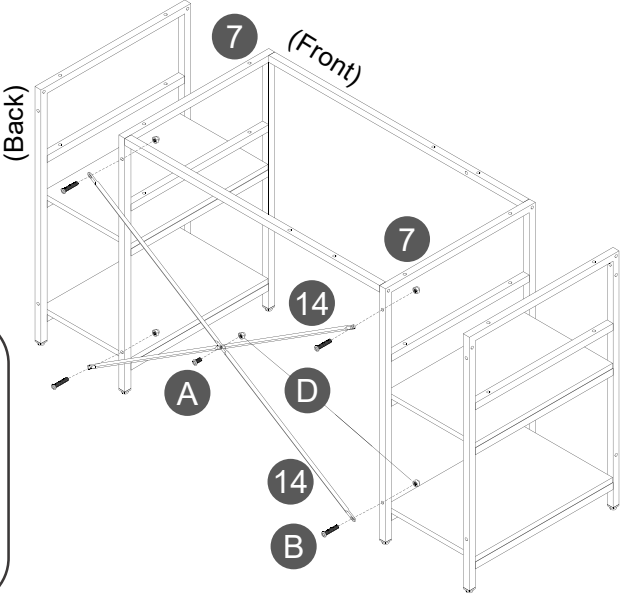


STEP 5					
Hardware:					
B	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"></td> <td style="text-align: center;">12 Pcs</td> </tr> <tr> <td colspan="2" style="text-align: center;">M6x30</td> </tr> </table>		12 Pcs	M6x30	
	12 Pcs				
M6x30					
					
					




- With the help of another person, place the corner top **2** and the right tabletop **3** over the frame, making sure the holes align.
- Secure the tabletops to the frames **7, 8** and the tubes **11** and **12** with screws **B** from underneath, but leave the screws loose to allow flexibility to fix any misalignments.

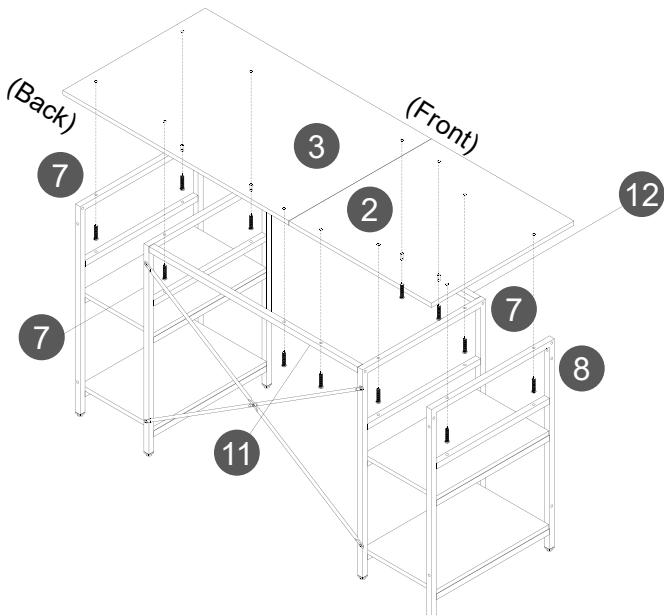

STEP 6					
Hardware:					
A	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"></td> <td style="text-align: center;">1 Pc</td> </tr> <tr> <td colspan="2" style="text-align: center;">M6x12</td> </tr> </table>		1 Pc	M6x12	
	1 Pc				
M6x12					
C	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"></td> <td style="text-align: center;">2 Pcs</td> </tr> <tr> <td colspan="2" style="text-align: center;">M6x40</td> </tr> </table>		2 Pcs	M6x40	
	2 Pcs				
M6x40					
					




- Assemble the left-top-back tube **9** and the left-top-front tube **10** to the frame **6** on their corresponding positions with screws **C**.
- Assemble the hook **16** to the frame **6** with screw **A**. Please note that the hook will be located on the inside of the frame but facing towards the outside.

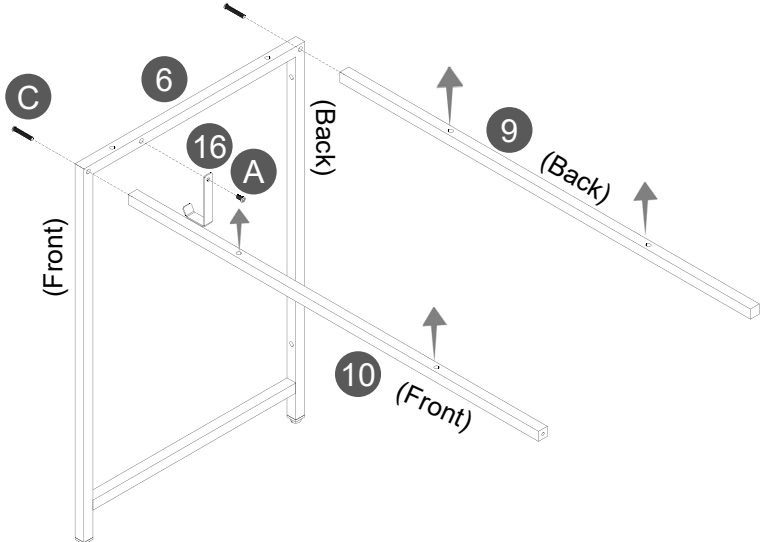


STEP 7		
Hardware:		
A	 M6x12	1 Pc
B	 M6x30	6 Pcs
G	 25x25 Bracket	1 Pc
		

- With the left tabletop **1** flipped upside-down, assemble to it the tubes **6**, **9** and **10** with screws **B**, but leave the screws loose to allow flexibility to fix any misalignments.
- Attach the bracket **G** to the tube **9** with screw **A**. Make sure to leave the bracket facing towards the outside.

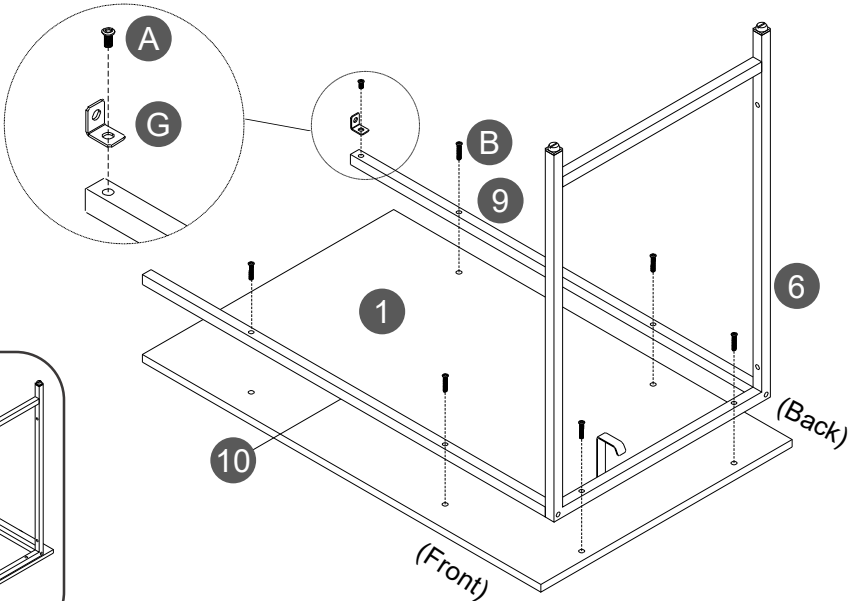

STEP 8		
Hardware:		
A	 M6x12	4 Pcs
		

- Assemble the supports **15** to the top shelf **5** with screws **A**.

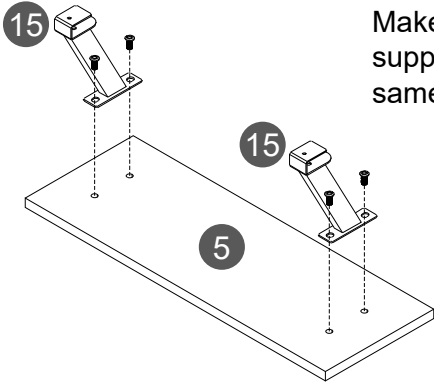


Make sure to attach the supports oriented in the same direction


At this point you will have 2 options to finish building your desk:



- A. Straight which allows to seat 2 persons. Follow steps **9A**, **10A** and **11A**.
- B. As an “L” shape for ample workspace for 1 person. Follow steps **9B**, **10B** and **11B**.

OPTION A: FOLLOW STEPS 9A, 10A and 11A.

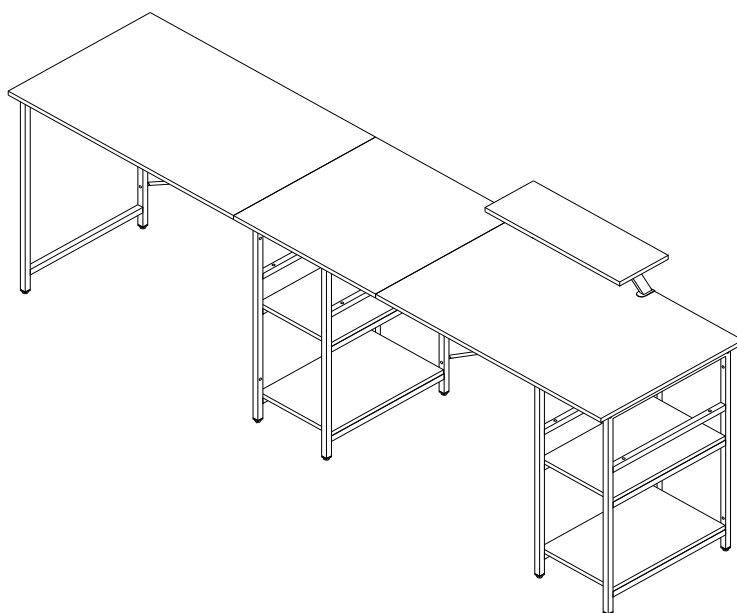



OPTION B: FOLLOW STEPS 9B, 10B and 11B.

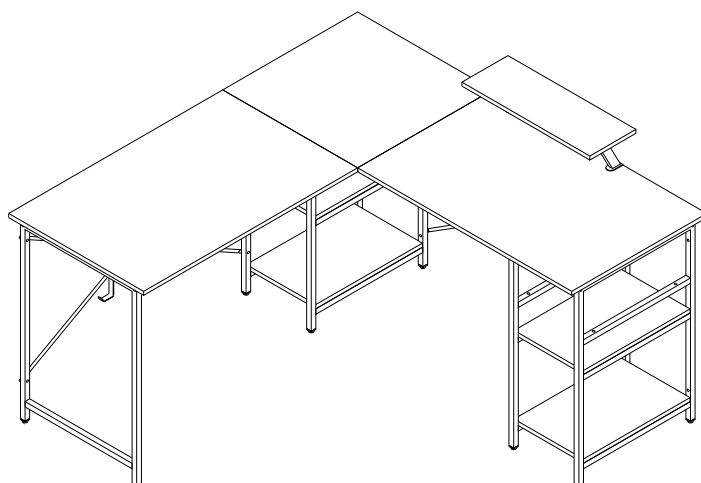


STEP 9A		
Hardware:		
B	 M6x30	1 Pc
C	 M6x40	1 Pc
D	 M6 Nut cap	1 Pc
		
		
		



- With the help of another person, assemble the left tabletop **1** to the rest of the unit using:
- Screw **B** going through the frame **7** and the bracket **G** on the tube **9** at the back of the unit, and secure with nut cap **D**.
 - Screw **C** going through the frame **7** and into the tube **10** at the front of the unit.

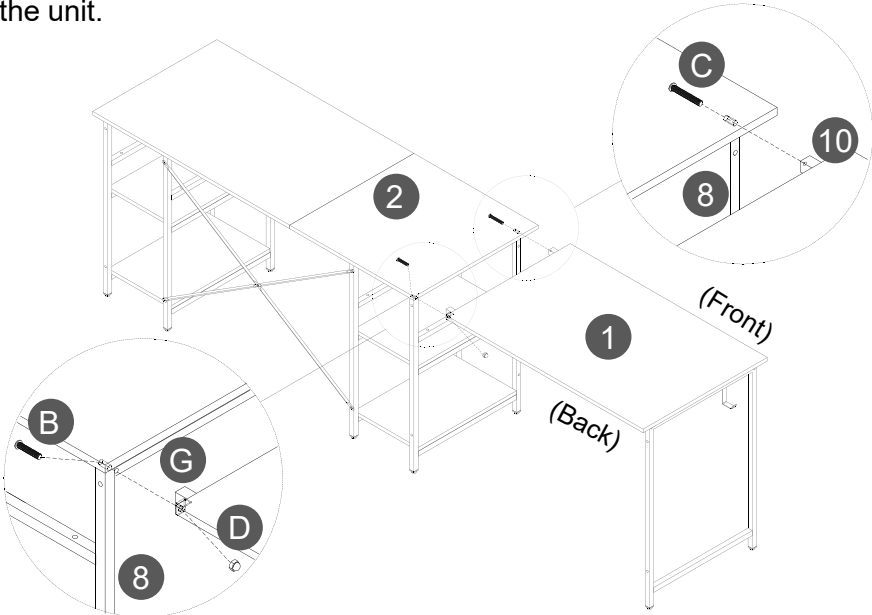


STEP 9B		
Hardware:		
B	 M6x30	1 Pc
C	 M6x40	1 Pc
D	 M6 Nut cap	1 Pc
		
		
		


- With the help of another person, assemble the left tabletop **1** to the rest of the unit using:
- Screw **B** going through the frame **7** and the bracket **G** on the tube **9** at the back of the unit, and secure with nut cap **D**.
 - Screw **C** going through the tube **12** and into the tube **10** at the front of the unit.

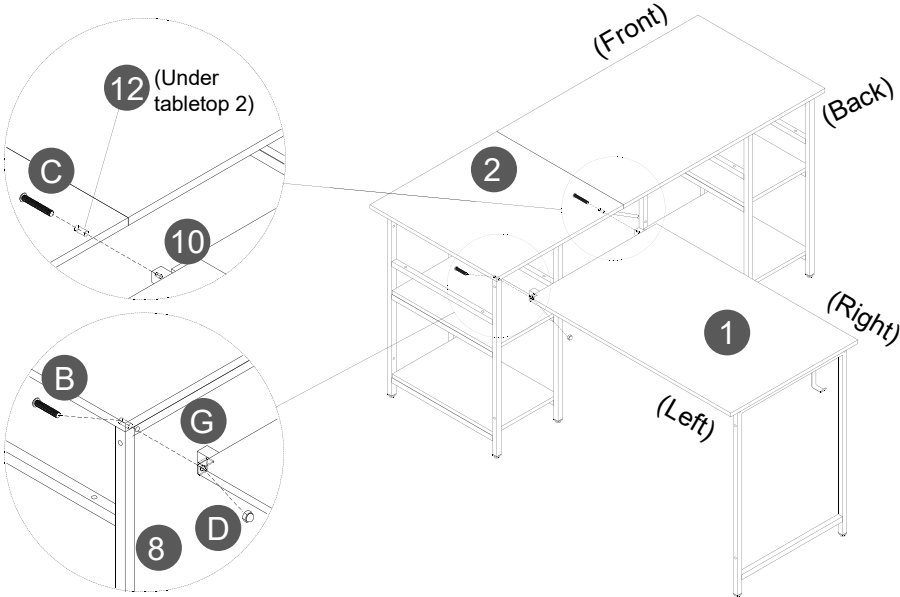


STEP 10A		
Hardware:		
A	 M6x12	1 Pc
B	 M6x30	4 Pcs
D	 M6 Nut cap	5 Pcs
		
		

- Join the long cross tubes **13** to each other in the center with screw **A** and nut cap **D**, but leave them loose.
- Attach the cross tubes **13** to the frames **6** and **8** with screws **B** and nut caps **D**. The caps go on the inside of the unit.
- Tighten all the screws and nut caps.

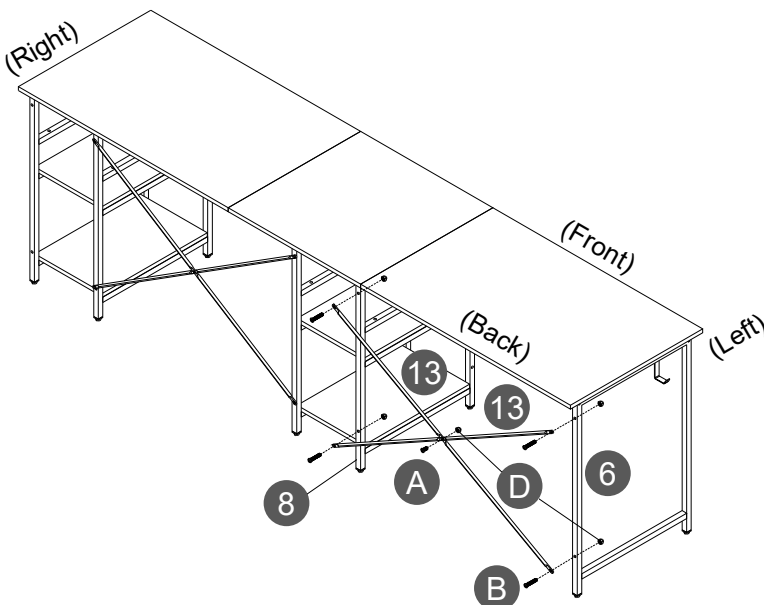

STEP 10B		
Hardware:		
A	 M6x12	1 Pcs
B	 M6x30	4 Pcs
D	 M6 Nut cap	5 Pcs
		
		

- Join the long cross tubes **13** to each other in the center with screw **A** and nut cap **D**, but leave them loose.
- Attach the cross tubes **13** to the frames **6** and **8** with screws **B** and nut caps **D**. The caps go on the inside of the unit.
- Tighten all the screws and nut caps.

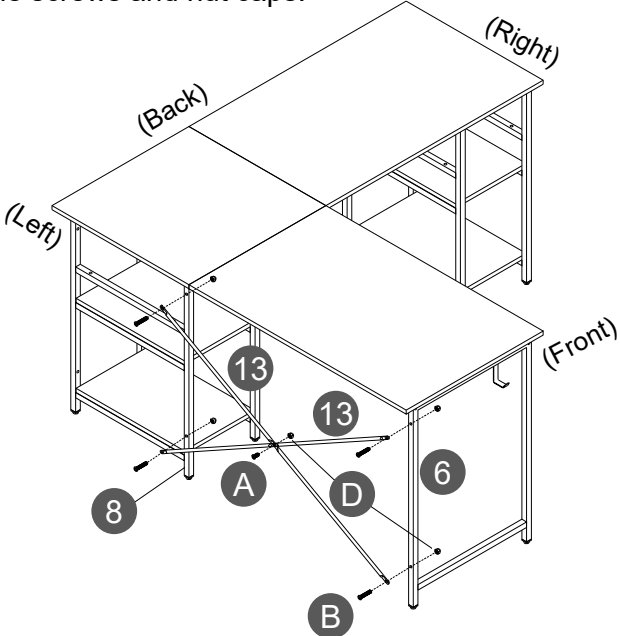


STEP 11A

Hardware:

E	 M6 Screw knob	2 Pcs
F	 30x25 Protector	2 pcs

- Mount the supports **15** to either tabletop **1** or **3** with the screw knobs **E** and the protector **F**.

ON RIGHT SIDE

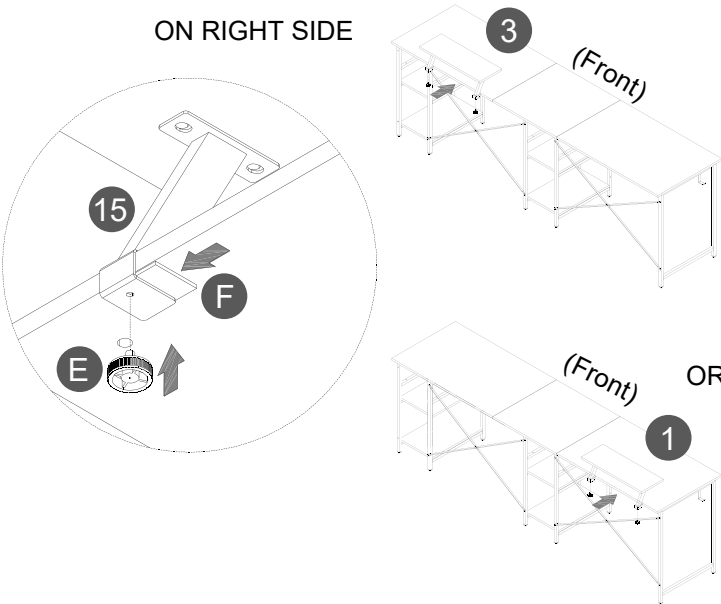

3 (Front)

OR ON LEFT SIDE

1 (Front)


STEP 11B

Hardware:

E	 M6 Screw knob	2 Pcs
F	 30x25 Protector	2 pcs

- Mount the supports **15** to either tabletop **1** or **3** with the screw knobs **E** and the protector **F**.

ON RIGHT SIDE

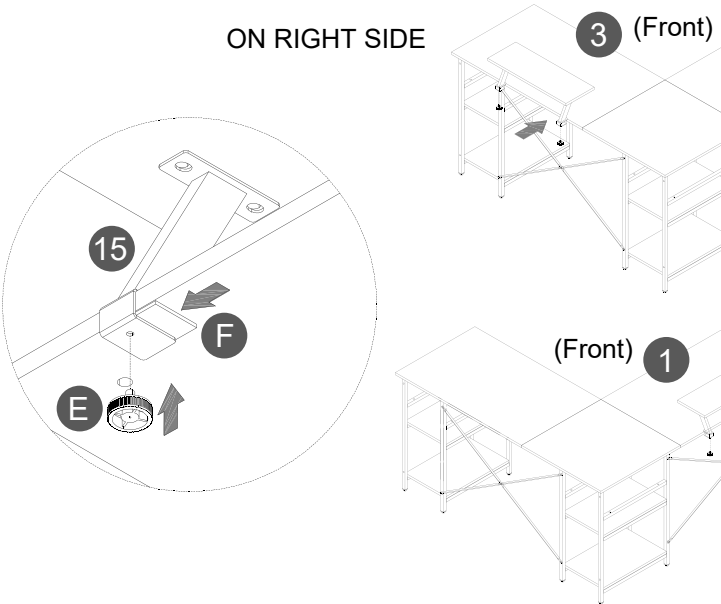

3 (Front)

OR ON LEFT SIDE


1 (Front)

 **ALL DONE!**

Give yourself a nice pat on the back. You did a great job!

CARE, MAINTENANCE AND SAFETY WARNINGS:

WEIGHT LIMITS

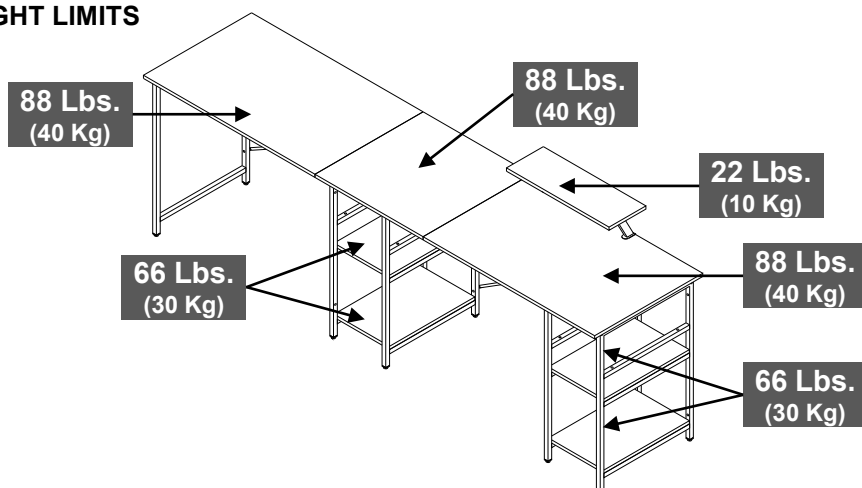

- Do not exceed the indicated weight limits.
- Do not expose the surfaces to direct sunlight or to extreme environmental conditions.
- Clean the surfaces preferable with a clean cloth damped in a solution of mild soap and water, then dry with a clean towel.
- Do not use solvents or abrasive materials to clean the unit.
- If you decide to use a cleaning agent, test first on an area hidden from view such as underneath the tabletops.
- Do not sit on the unit or lean against it.
- Do not allow small children to play under the unit or climb over it.
- Do not pull, push or drag the unit to move it for more than 1 feet. The unit must be lifted by at least 2 persons when moving in the same or adjacent rooms.
- Before moving the unit, make sure to secure or remove any object that is heavy or might fall off.
- Lift from the frame, not the tabletops.
- When lifting the unit, use both hands and bend your knees, not your backs.
- When transporting the unit to places far away, protect and secure the unit to avoid damage in transit. If possible, disassemble it in sections.
- Shall any part of the unit become defective during the warranty period, replacement parts might be available to you at no charge. Please refer to the last pages on this manual.
- The warranty does not extend to regular wear and tear, nor the manufacturer assumes liability for damages or consequences due to accidents, incorrect assembly, negligence, improper use, modifications, or not heeding the above warnings.

P.14	RTA-733DL	P.14
------	-----------	------

TECHNI MOBILI DESK WARRANTY

DESKS/LAPTOP CARTS/FILE CABINETS: LIMITED 5-YEAR WARRANTY

RTA Products, LLC warrants to the Original Purchaser who acquired a new product from RTA Products or its authorized resellers that this product will be free from defects in its workmanship and materials, under normal use and service conditions, as described herein. "Defects" as used in this warranty, is defined as any imperfections that impair the use of the furniture or product. RTA Products LLC will replace any defective part, at its discretion, and without charge to the original purchaser other than the freight from the end consumer to RTA Products.

Replacement parts can only be supplied if parts are available. Items out of production may be unavailable. This warranty will be effective for the applicable time period beginning the date of purchase on your original sales receipt. RTA product's obligation under this warranty is limited to repairing or replacing products or parts as provided herein. This product has been designed for and is intended for office and home-office use only. This warranty is Original Purchaser's sole remedy for product defects, and this warranty does not extend to any product, or damage to any product, caused by or attributed to abuse or misuse, products used for commercial or rental purposes, use modifications of, or attachments to the product, and products or parts not used, maintained, or extended hereunder is in lieu of any and all other warranties, express or implied, including without limitations any implied warranty or merchantability or of fitness for a particular purpose. Please note, all desks made with PVC Laminate surface should not be exposed to direct sunlight, as it may damage the material. Damage of this nature is not covered under this warranty.

RTA Products will not be responsible for indirect, special, incidental or consequential damages. This warranty is limited to merchandise purchased in the Continental United States, excludes AK, HI and PR. Some States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights. You may also have other rights that may vary from state to state.

RTA Products will advise you of the procedure to follow in making warranty claims. The following are the procedures for warranty claims:

- a. Call us Monday – Friday, from 9am-5pm (Eastern Time) at (866) 782-5520 to explain the defect and give your name, address and phone number. Please have ready the model number of our product, date and place of purchase. You can also write to us by e-mail to warranty@rtaproducts.com and include the same information.
- b. If we determine that replacement will remedy the situation, and in order to determine the extent or the cause of the defect, purchaser will need to send the part in question at purchaser's expense. Once we receive the part, we will examine it and determine whether the claim is valid (or not), and then proceed to send the replacement. We will ship the replacement at our expense.

FOR SEVERAL HELP OPTIONS INCLUDING REPLACEMENT PARTS ORDERS

VISIT: WWW.TECHNIMOBILI.COM



CLICK ON SUPPORT TAB



Scan QR Code to order replacement parts

OR EMAIL US: SUPPORT@RTAPRODUCTS.COM