











CROSLEY

FURNITURE



Kitchen Storage Pantry CF3146

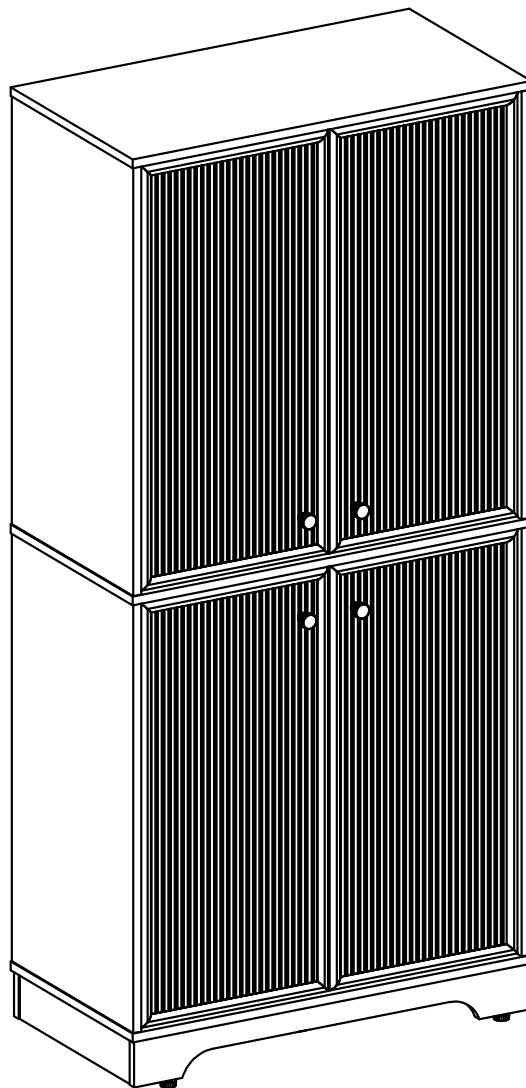

PART LIST

A	B	C	D	E
				
Top Panel 1 PC	Fixed Panel 1 PC	Bottom Panel 1 PC	Bottom Left Panel 1 PC	Bottom Right Panel 1 PC
F	G	H	I	J
				
Top Left Panel 1 PC	Top Right Panel 1 PC	Adjustable Shelf 2 PCS	Support Rail 2 PCS	Bottom Front Support 1 PC
K	L	M	N	O
				
Bottom Back Support 1 PC	Bottom Side Support 2 PCS	Bottom Middle Support 1 PC	Door 2 PCS	Door 2 PCS
P	Q	R	S	
				
Cover 1 PC	Back Panel 1 PC	Back Panel 2 PCS	Back Panel 1 PC	

HARDWARE LIST

#1		#2		#3		#4		#5	 10 x 33.5 mm
Cam Lock 52 PCS (Extra 1)		Cam Bolt 52 PCS (Extra 1)		Cam Sticker 52 PCS (Extra 1)		Plastic Dowel 67 PCS (Extra 1)		Confirmat Screw 7 PCS (Extra 1)	
#6	 4 x 25 mm	#7		#8		#9		#10	
Bolt 4 PCS (Extra 1)		Adjustable Leveler 5 PCS (Extra 1)		Knob 4 PCS		Shelf Pin 8 PCS (Extra 1)		Full Curve Hinge 8 PCS	
#11		#12	 4 x 10 mm	#13		#14			
Allen Wrench 1 PC		Euro Screw 16 PCS (Extra 1)		Safety Strap Kit 1 SET		Binding Post 1 SET (Extra 1)			
#15									
Wall Anchor 1 PC									

ADDITIONAL TOOLS (not provided)

NOTE: It is not recommended to use power tools during assembly




Phillips Head Screwdriver

NOTE: Lay all parts on a soft surface, such as carpet to assemble unit.

NOTE: Plastic dowels are intended for alignment. Additional clearance between plastic dowel and pre-drilled hole is intentional for ease of assembly.


IMPORTANT NOTE: WE RECOMMEND AT LEAST TWO PEOPLE WORK TOGETHER TO ASSEMBLE UNIT.

Please adjust hinges as needed for proper door alignment.

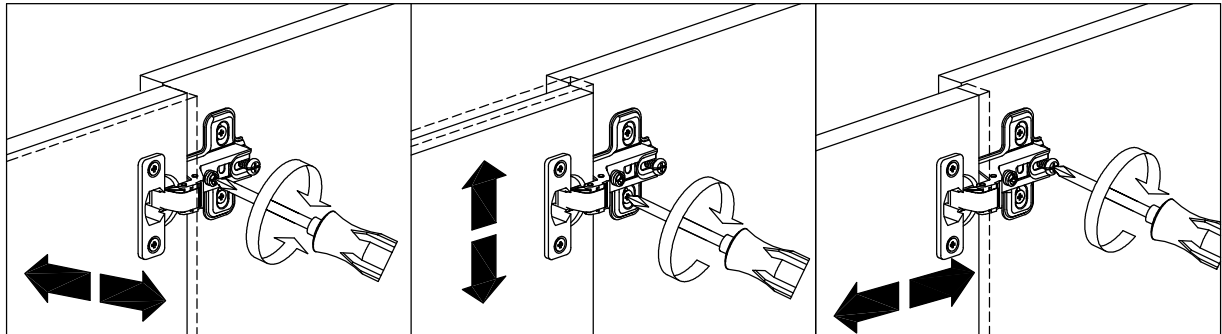

Step 1. Screw cam bolts (part #2) into top panel (part A) and bottom panel (part C) using phillips head screwdriver.


Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.

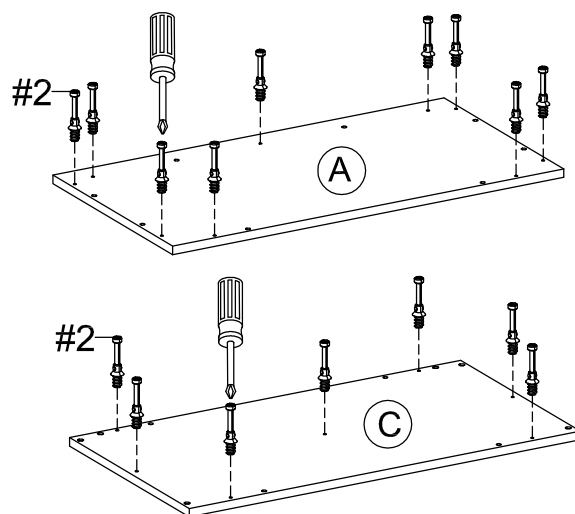

#2  x 16

Step 2. Screw cam bolts (part #2) into fix panel (part B) using phillips head screwdriver.


Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.

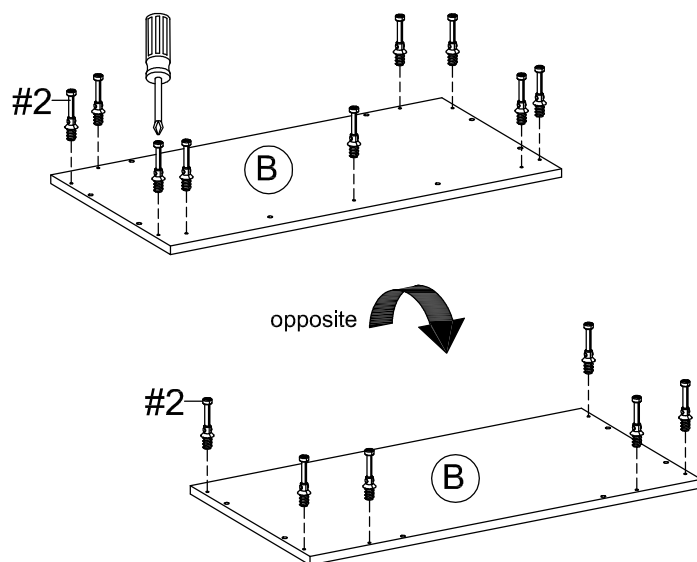

#2  x 15


Step 3. Screw cam bolts (part #2) into bottom left panel (part D) and bottom right panel (part E) using phillips head screwdriver. Insert cam locks (part #1) and plastic dowels (part #4) into bottom left panel (part D) and bottom right panel (part E).

Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.

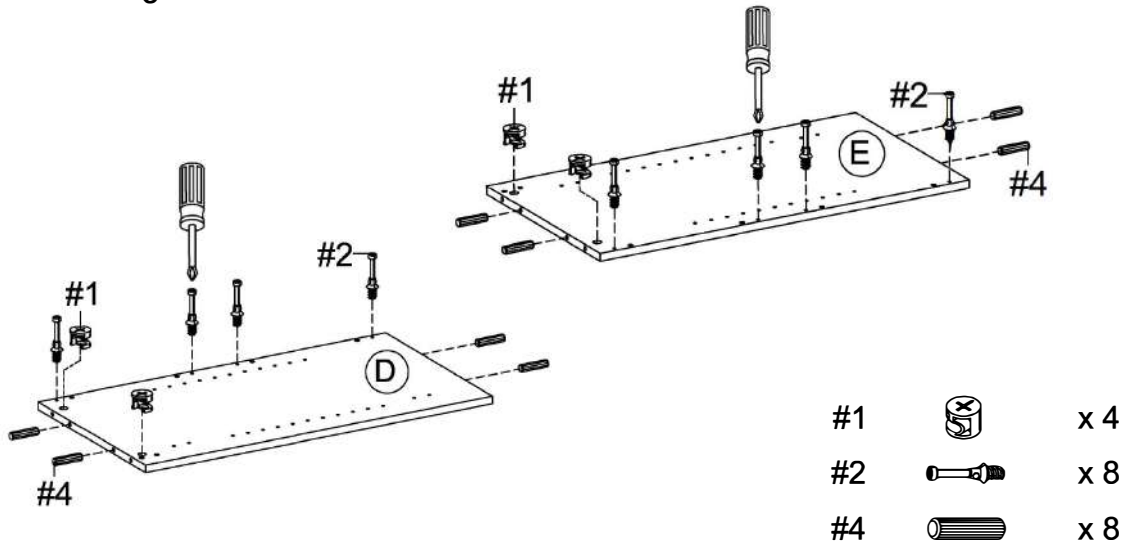

Step 4. Screw cam bolts (part #2) into top left panel (part F) and top right panel (part G) using phillips head screwdriver. Insert cam locks (part #1) and plastic dowels (part #4) into top left panel (part F) and top right panel (part G).

Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.

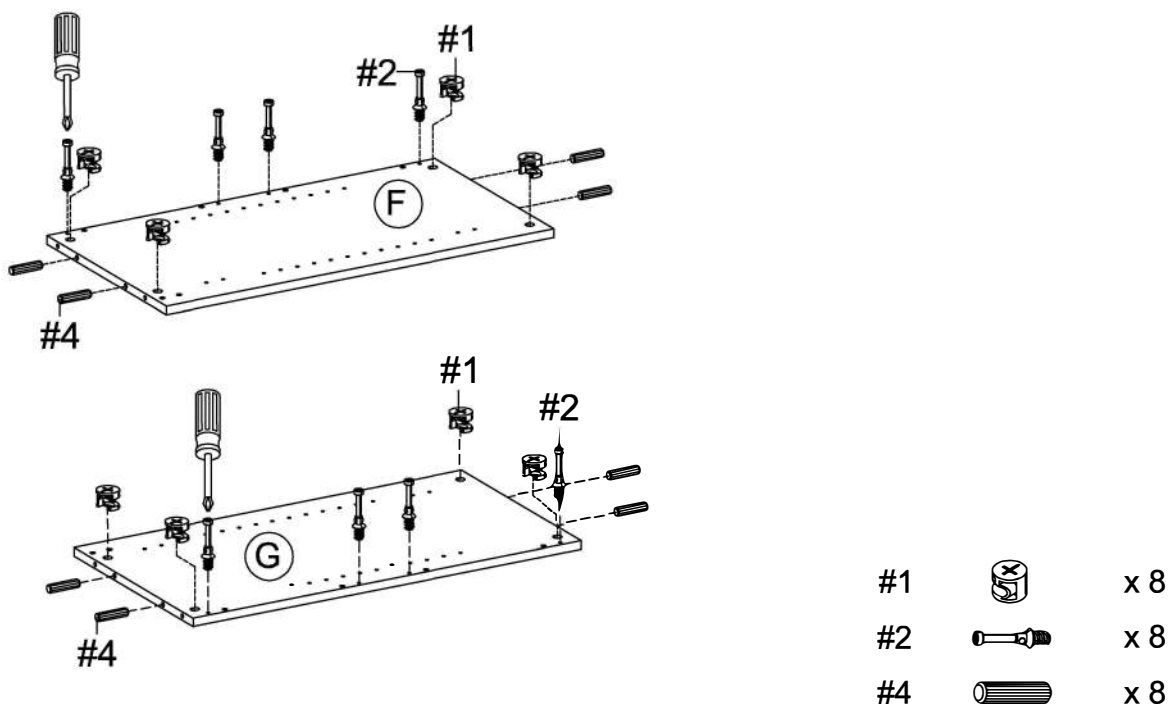


Step 5. Screw cam bolts (part #2) into bottom front support (part J) using phillips head screwdriver.

Attach adjustable levelers (part #7) into bottom front support (part J).

Insert cam locks (part #1) and plastic dowels (part #4) into bottom front support (part J) and support rails (part I).

Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.

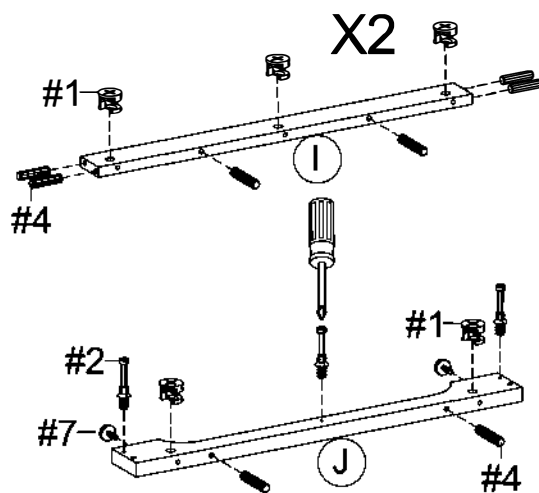




#1		x 8
#2		x 3
#4		x 14
#7		x 2

Step 6. Screw cam bolts (part #2) into bottom back support (part K) using phillips head screwdriver.

Attach adjustable levelers (part #7) into bottom back support (part K) and bottom middle support (part M).


Insert cam locks (part #1) and plastic dowels (part #4) into bottom back support (part K), bottom side supports (part L) and bottom middle support (part M).

Note: Do not overtighten cam bolts. Stop tightening once threads on cam bolt are no longer visible.

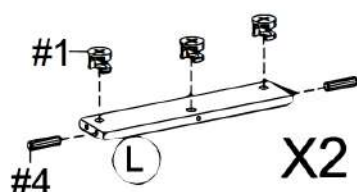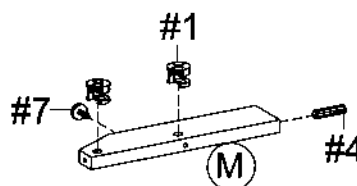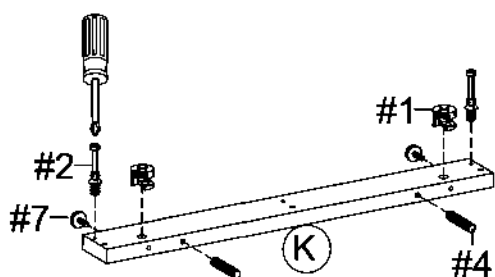



#1		x 10
#2		x 2
#4		x 7
#7		x 3

Step 7. Insert cam locks (part #1) and plastic dowels (part #4) into back panel (part Q).

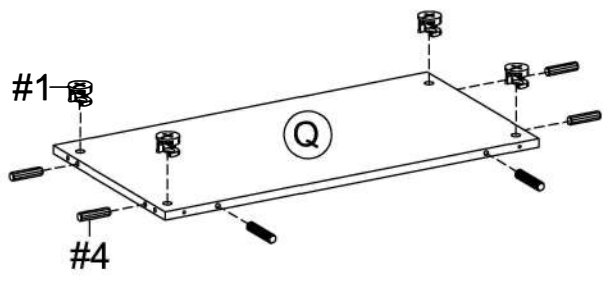

- | | | |
|----|---|-----|
| #1 |  | x 4 |
| #4 |  | x 6 |



Step 8. Insert cam locks (part #1) and plastic dowels (part #4) into back panels (parts R & S).

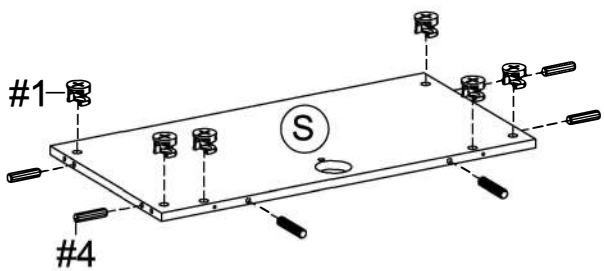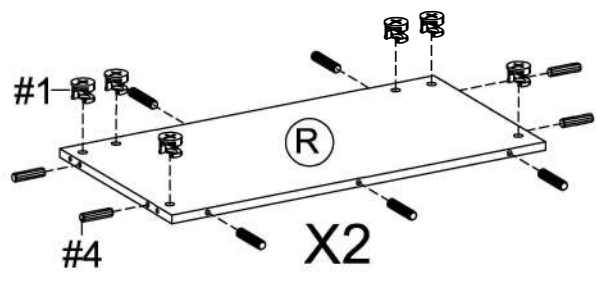

- | | | |
|----|---|------|
| #1 |  | x 18 |
| #4 |  | x 24 |



Step 9. Attach bottom front support (part J) and bottom back support (part K) to bottom side supports (part L) and bottom middle support (part M) using confirmat screw (part #5) and phillips head screwdriver. Use phillips head screwdriver to turn the cam locks (part #1) clockwise to fasten.

Note: Cam locks must rotate a full 180°. See pictured insert.

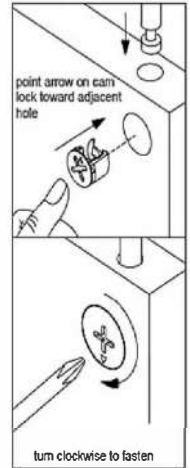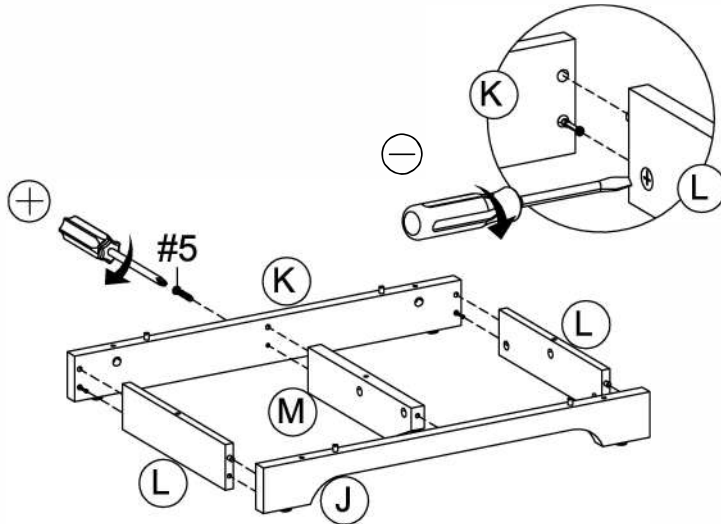


#5  x 1

Step 10. Attach back panel (part R) to back panel (part S).
Attach back panel (part R) to back panel (part Q).

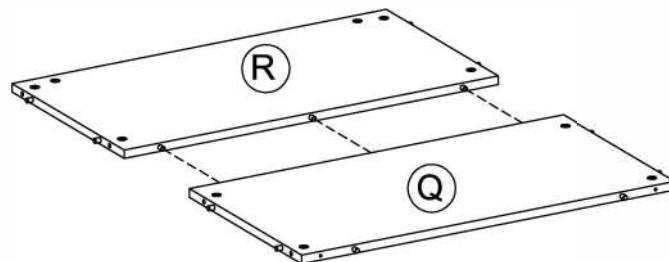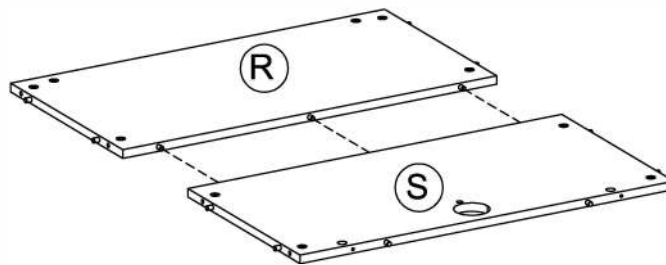


Step 11. Attach top left panel (part F) and top right panel (part G) to support rail (part I) and back panels (parts R & S).
 Use phillips head screwdriver to turn cam locks (part #1) clockwise to fasten.

Note: Cam locks must rotate a full 180°. See pictured insert.

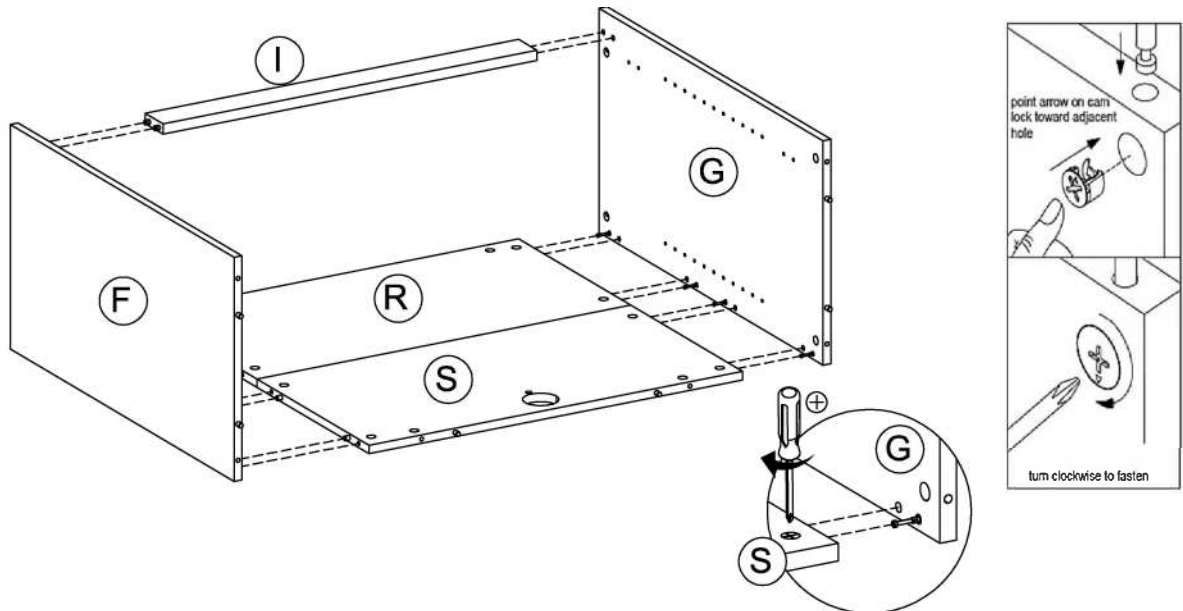


Step 12. Attach top panel (part A) to assembled unit (parts F, G, I & R).
 Use phillips head screwdriver to turn cam locks (part #1) clockwise to fasten.

Note: Cam locks must rotate a full 180°. See pictured insert.

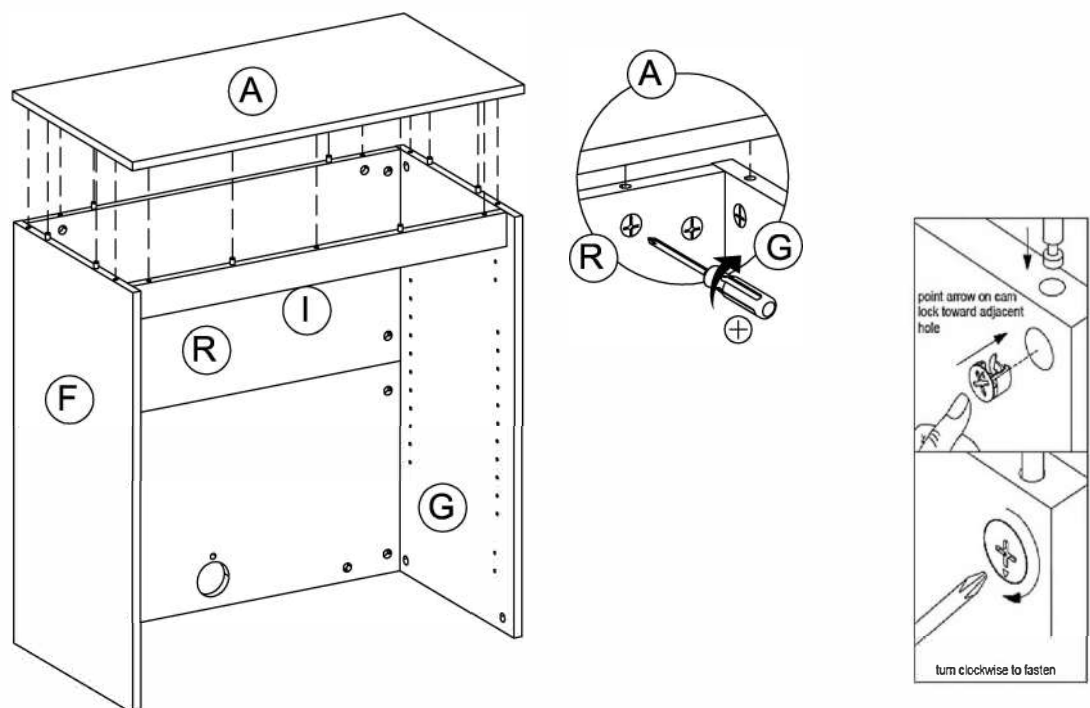


Step 13. Attach bottom left panel (part D) and bottom right panel (part E) to support rail (part I) and back panels (parts R & Q).
 Use phillips head screwdriver to turn cam locks (part #1) clockwise to fasten.

Note: Cam locks must rotate a full 180°. See pictured insert.

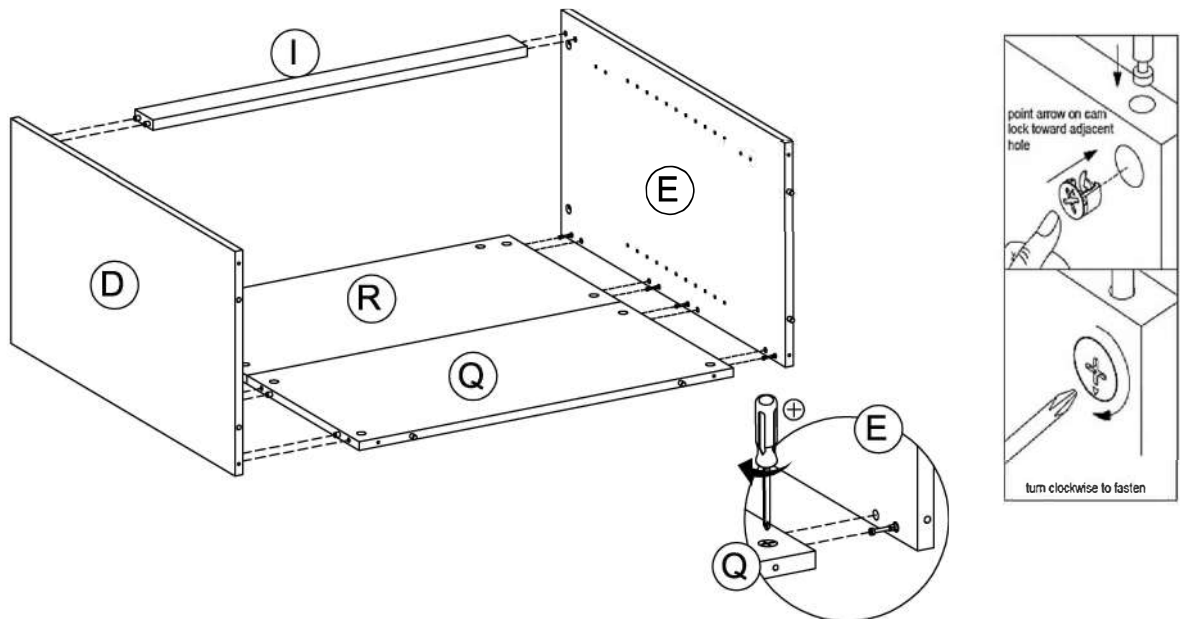


Step 14. Attach bottom panel (part C) to assembled unit (parts D, E & Q) using confirmat screws (part #5) and phillips head screwdriver.

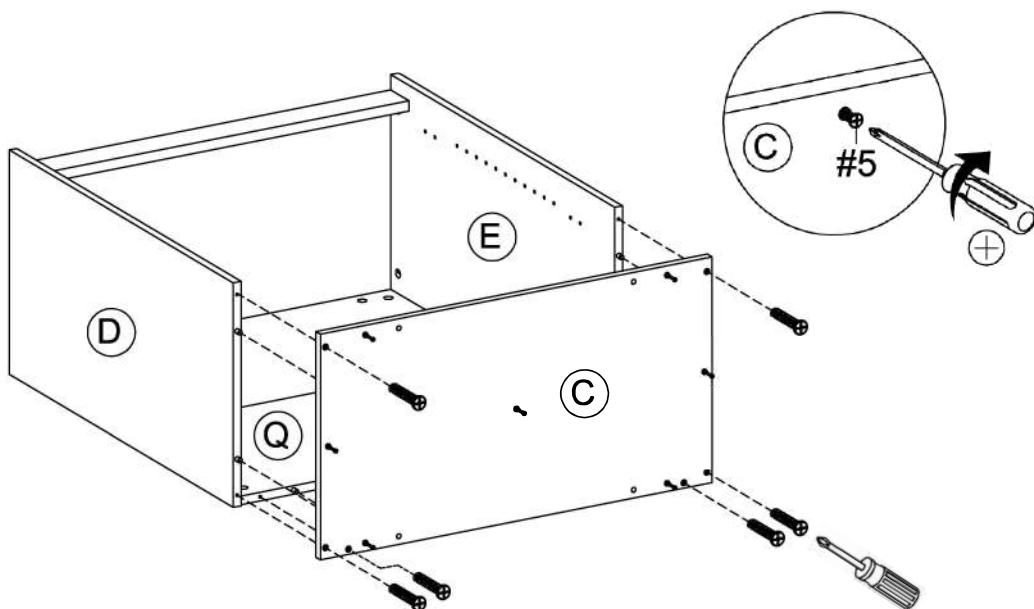

#5  x 6


Step 15. Attach assembled unit (parts J, K, L & M) to assembled unit (part C).
Use phillips head screwdriver to turn cam locks (part #1) clockwise to fasten.

Note: Cam locks must rotate a full 180°. See pictured insert.

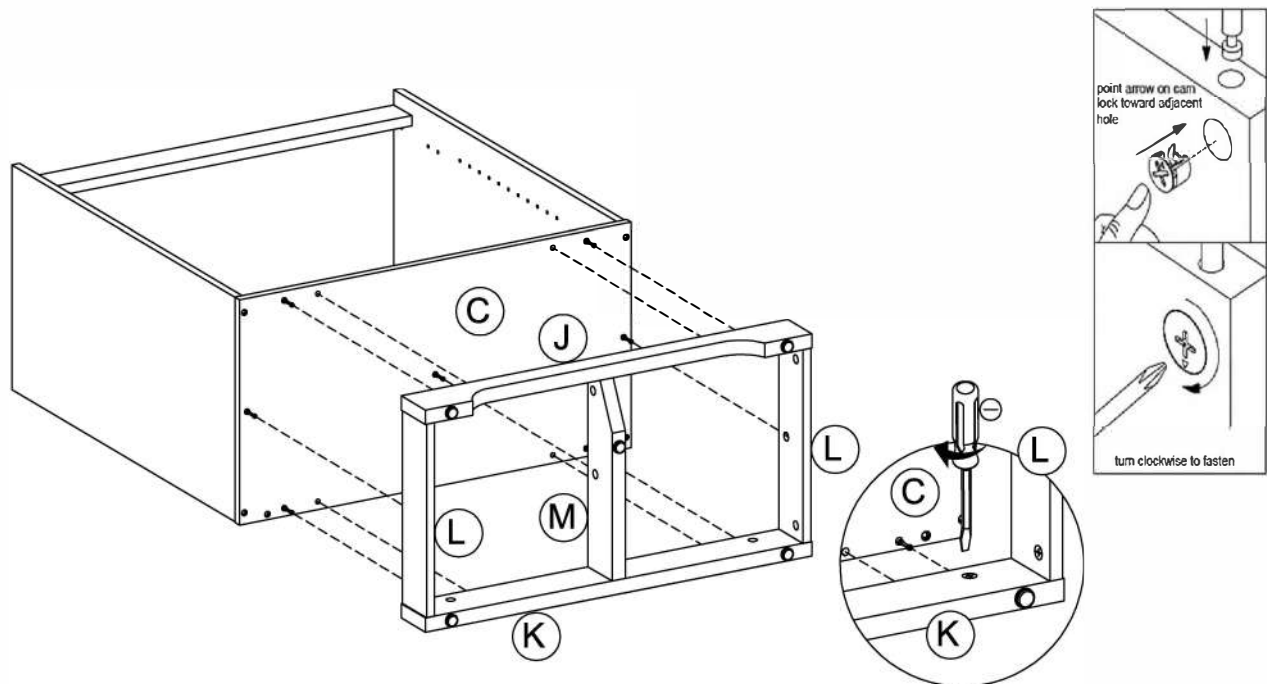



Step 16. Carefully turn unit upright. Attach fixed panel (part B) to assembled unit (parts D, E, I & R).
Use phillips head screwdriver to turn cam locks (part #1) clockwise to fasten.

Note: Cam locks must rotate a full 180°. See pictured insert.

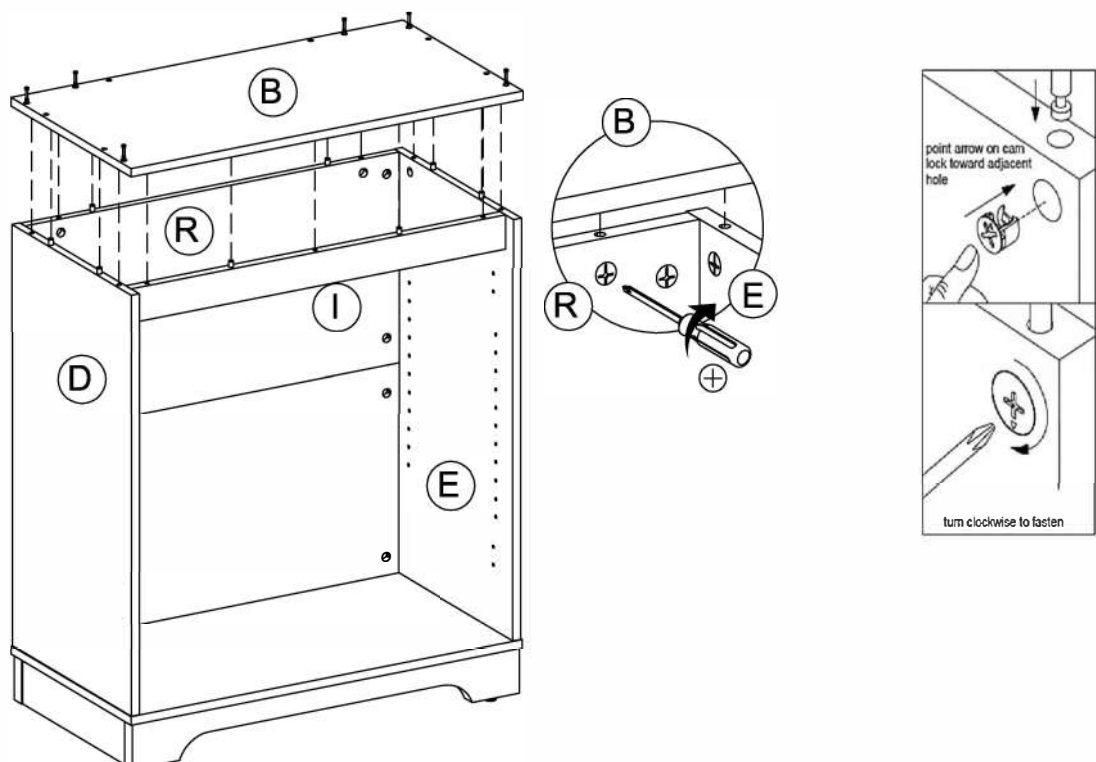


Step 17. Attach assembled unit (parts F, G & S) to assembled unit (part B).
Use phillips head screwdriver to turn cam locks (part #1) clockwise to fasten.

Note: Cam locks must rotate a full 180°. See pictured insert.

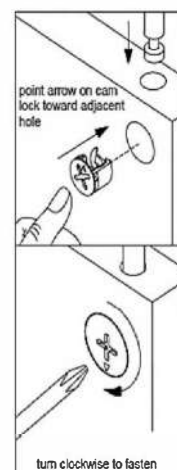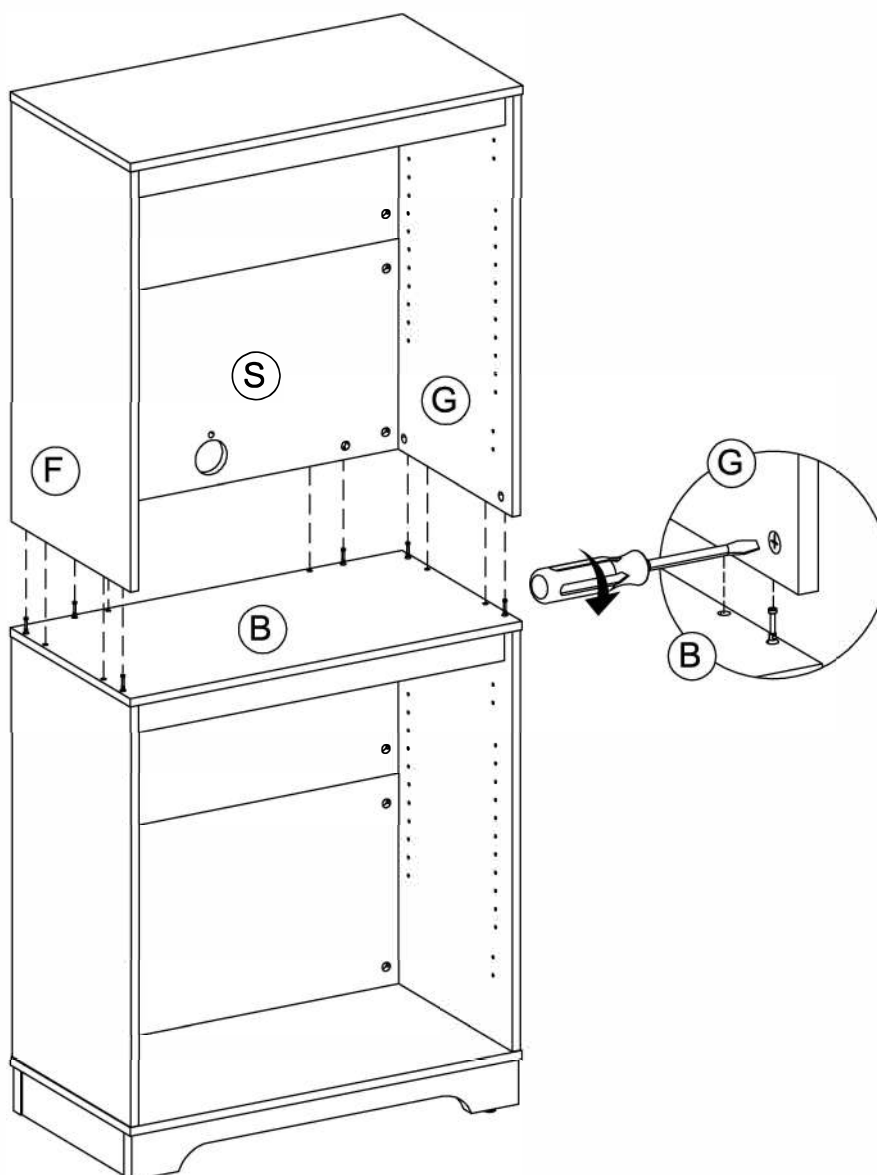


Step 18. Attach cover (part P) to back panel (part S) using binding post (part #14), allen wrench (part #11) and phillips head screwdriver.

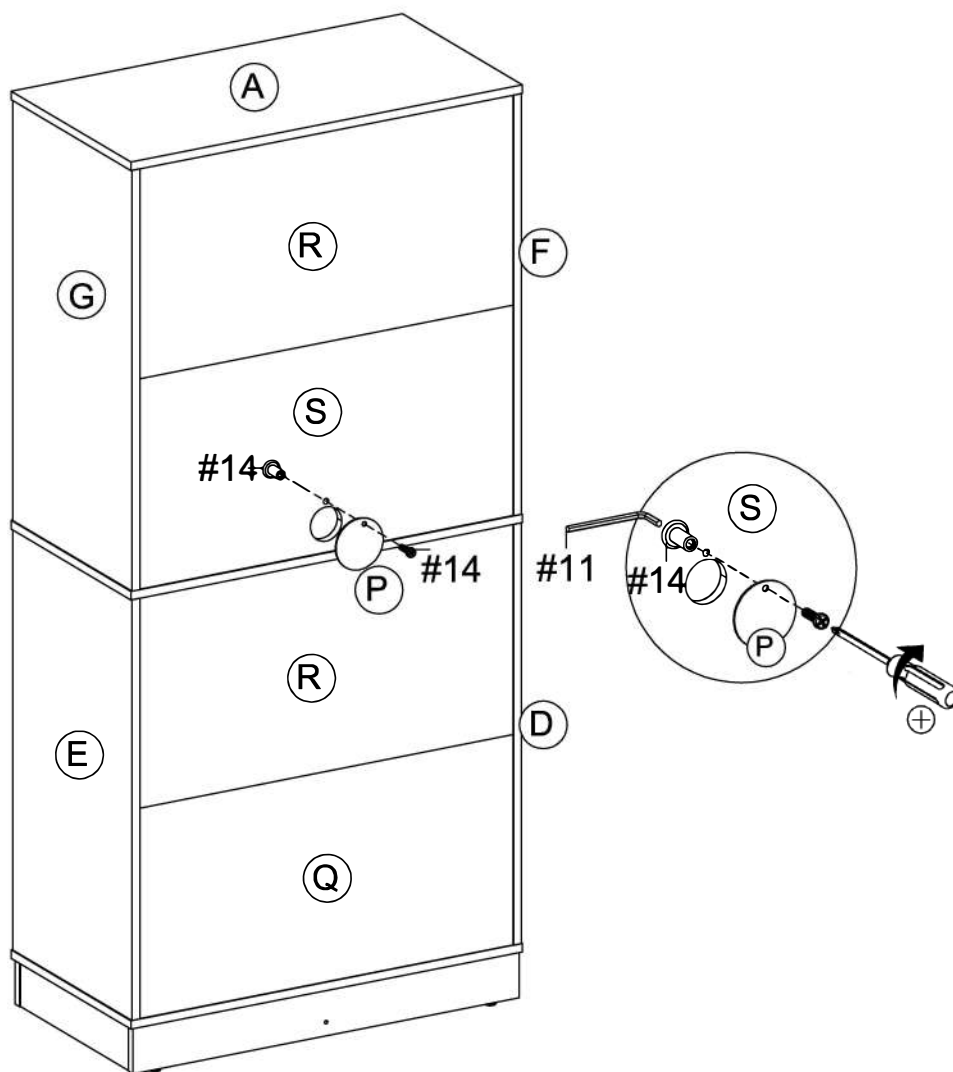


- | | | |
|-----|--|-----|
| #11 | | x 1 |
| #14 | | x 1 |

Step 19. Attach full curve hinges (part #10) to doors (part N & O) using euro screws (part #12) and phillips head screwdriver.
 Attach knobs (part #8) to doors (part N & O) using bolts (part #6) and phillips head screwdriver.

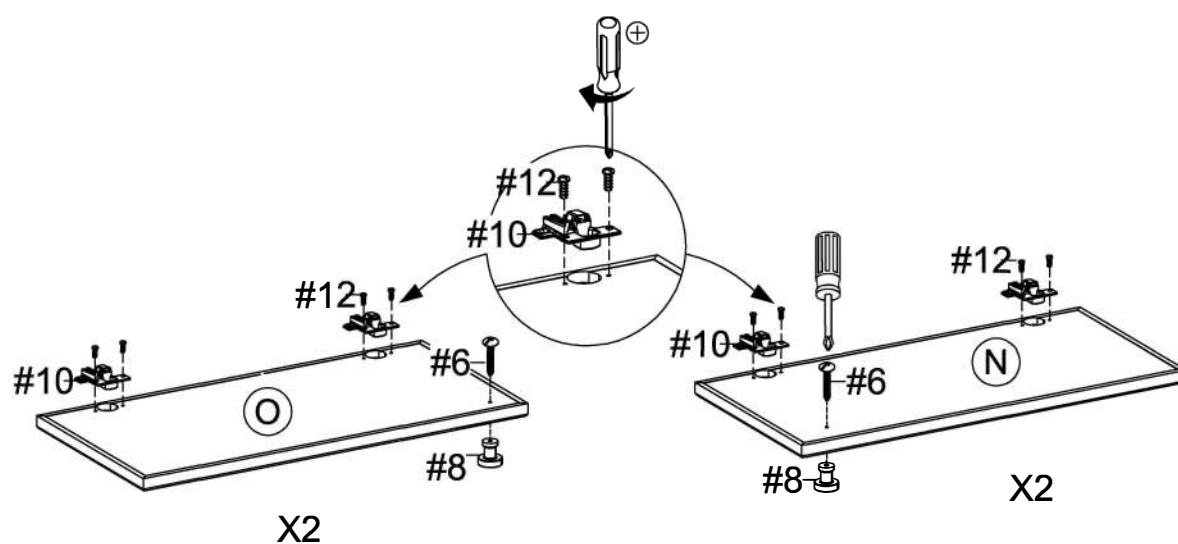


#6		x 4
#8		x 4
#10		x 8
#12		x 16

Step 20. Attach doors (parts N & O) with full curve hinges (part #10) to assembled unit (parts D, E, F & G) using phillips head screwdriver.

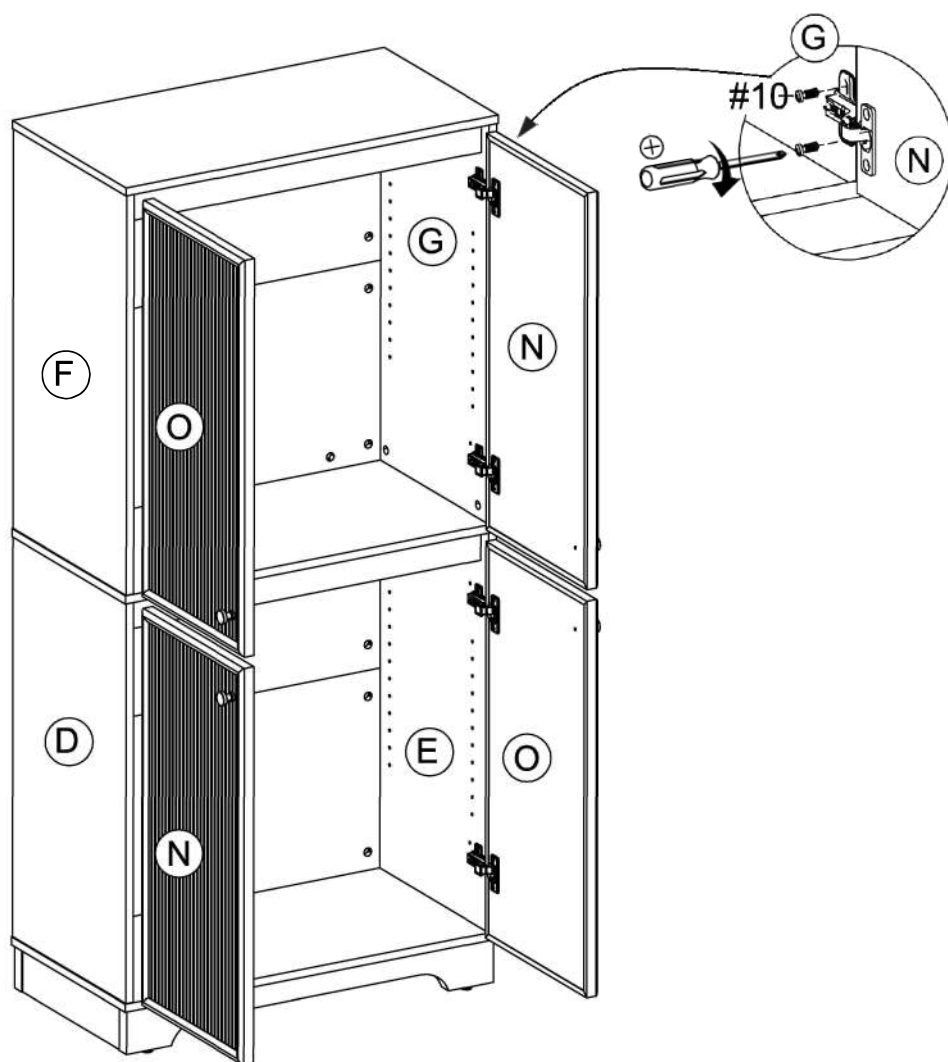

Step 21. Place shelf pins (part #9) into desired position and slide adjustable shelves (part H) into place.

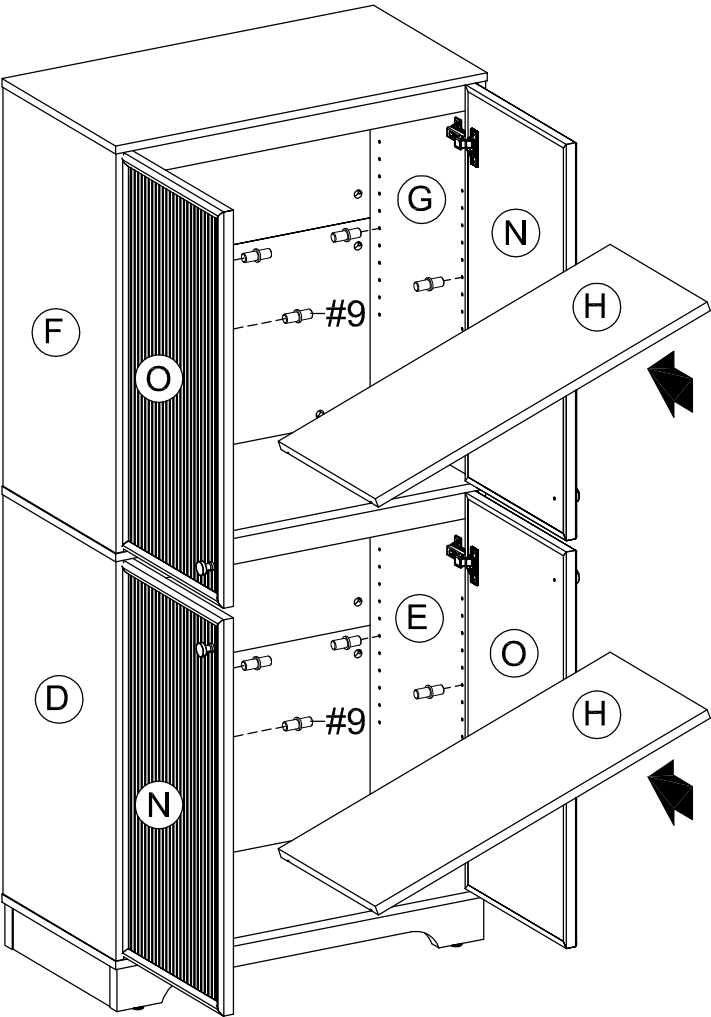


#9  x 8


Step 22. Use cam stickers (part #3) to cover all cam locks (part #1).

Note: It is important to adjust levelers once fully assembled and upright.
Extend adjustable leveler until it's firmly in contact with the floor. If relocating,
adjust levelers as needed until it's firmly contact with the floor in new location.

Important: Safety strap kit (part #13) must be installed to prevent tipping,
damage and/or injury.

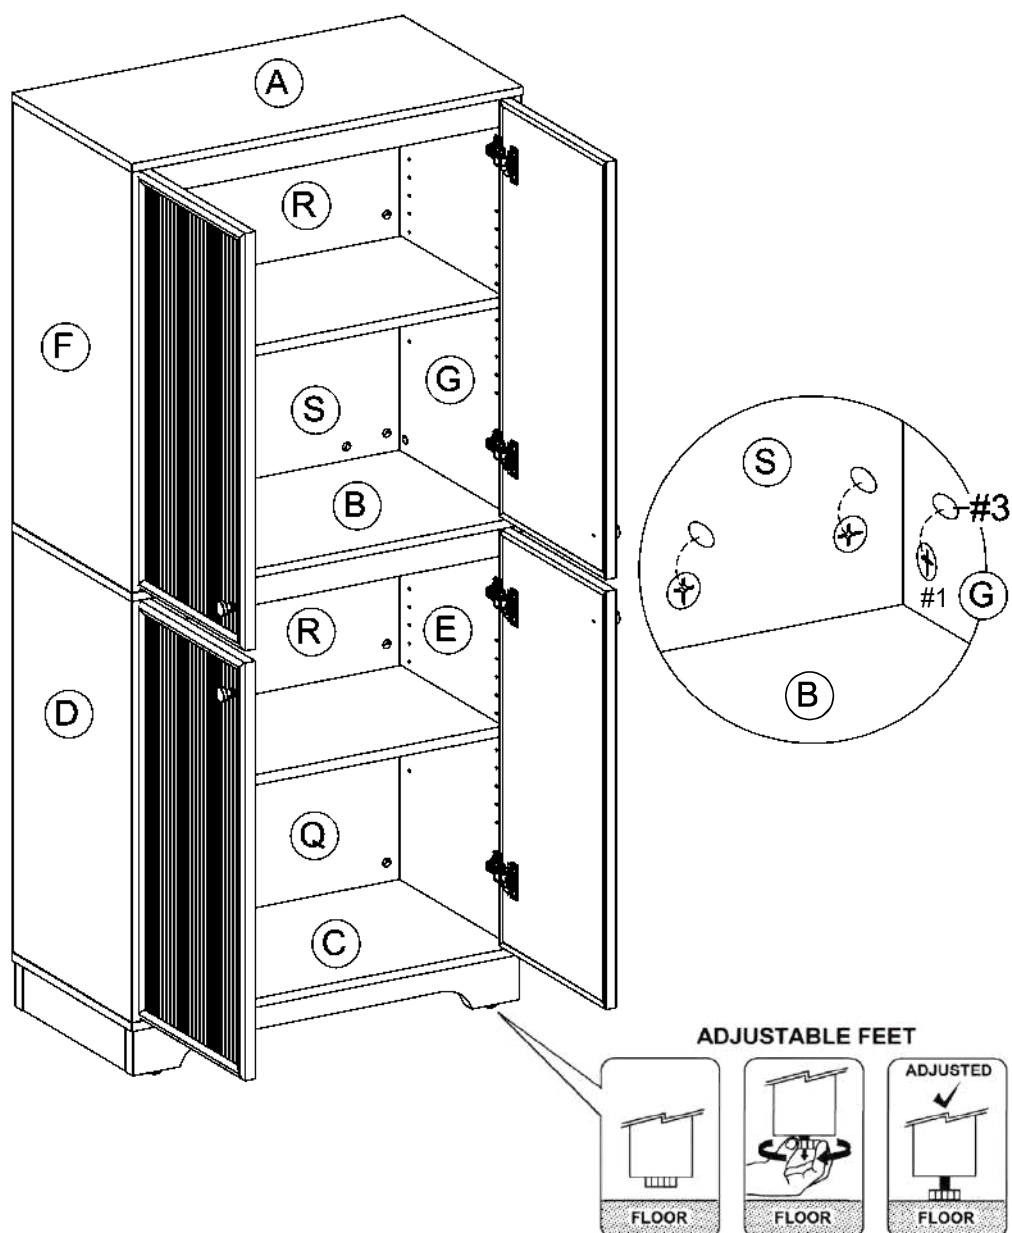

#3  x 52

#13	A	B	C	D	#15
					
Safety Strap Kit 1 SET	Bracket 2 PCS	Short Screw 1 PC	Long Screw 1 PC	Safety Wall Strap 1 PC	Wall Anchor 1 PC

SAFETY WALL STRAP INSTALLATION

NOTE: It is highly recommended to install this safety strap kit to prevent tipping, damage and/or injury.

1. Insert short screw (B) and safety wall strap (D) through bracket (A) and attach to top panel (part A) using phillips head screwdriver.
2. Drill 1 1/32" hole where you want to secure the unit. The drilled hole will be at the same height as hole in top panel (part A) where bracket (A) is attached. Tap wall anchor (part #15) into the hole.
3. Insert long screw (C) and safety wall strap (D) through bracket (A) into wall anchor (part #15) using phillips head screwdriver.

Note: This item is not intended for clothing storage use.

