

WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
 - * This item should be assembled on a soft surface to prevent scratching the finish during assembly
 - * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
 - *The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	machine screw		2X	G	screwed ball		2X
B	mounting screw		2X	H	lamp holder		1X
C	mounting bracket		1X	I	bulb		6X
D	ground screw		1X	J	glass shade		6X
E	wire connector		3X				

JY
JONATHAN Y

Model#: JYL3560

Product Dimensions:40"L x7.5"W x 9.25"H

Product Dimensions: 101.6 x 19.1x23.5 CM

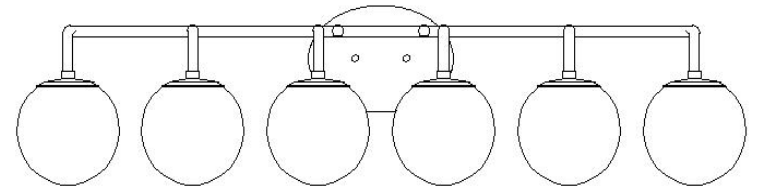

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.


Estimated Assembly Time: 25 minutes.

The number of people required to assemble the product:1 person.

If there are any questions relating to defects, missing parts, assembly issues, replacements, or device connectivity issues, please send a detailed email to cs@jonathany.com


1. Fix the mounting bracket(C) to the outlet box with machine screw(A).
2. Make wire connections, with wire connectors(E), following the reference chart listed below.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

- Grounding Instructions:
- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw(D) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
 - b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.
3. Orient the back plate (F) so that the screws(B) protruding from the mounting bracket go into the holes in the back plate ,then secure it with the provided screwed balls(G).
 4. Install bulbs(I). Be sure to use light bulb(s) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.
 5. Put the glass shade(J) over lamp holder (H)

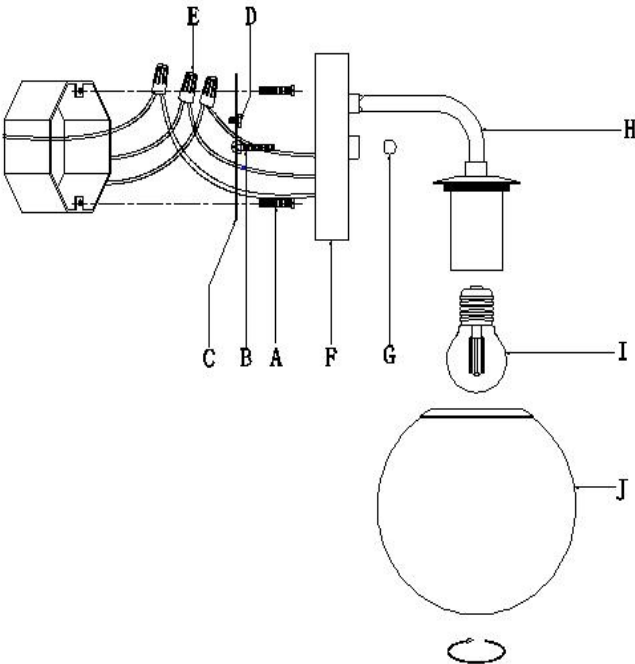

PLEASE USE TYPE"A" BULB MAX 25-WATT OR LED BULB MAX 5-WATT, THERE ARE 6PCS LED BULB 4-WATT IN THE BOX

ENJOY YOUR LAMP

ADVERTENCIA

RECOMENDAMOS QUE LA INSTALACIÓN DE ESTE ACCESORIO DE ILUMINACIÓN SEA REALIZADA POR UN ELECTRICISTA LICENCIADO.

ADVERTENCIA *** DESCONECTE EL SUMINISTRO ELÉCTRICO PRINCIPAL DESDE LA CAJA DE FUSIBLES/INTERRUPTOR AUTOMÁTICO ANTES DE LA INSTALACIÓN.

INSPECCIONE EL ARTÍCULO CUIDADOSAMENTE ANTES DE INTENTAR INSTALARLO. SI HAY ALGÚN DAÑO

CUIDADO Y MANTENIMIENTO

Para limpiar el interior del accesorio, primero desconecte la energía del accesorio apagando el interruptor automático o quitando el fusible de la caja de fusibles. Luego, use un paño limpio seco o ligeramente humedecido (use agua limpia, nunca un solvente) para limpiar la superficie interior del accesorio. No use limpiadores con químicos, solventes o abrasivos fuertes. Use solo un paño suave y seco para limpiar con cuidado.

AVISO E INSTRUCCIONES DE SEGURIDAD IMPORTANTES


* Asegúrese de tener todas las partes indicadas antes de comenzar el ensamblaje de este artículo.

* Este artículo debe ensamblarse sobre una superficie suave para evitar rayar el acabado durante el ensamblaje.

* Para reducir el riesgo de incendio, descarga eléctrica o lesiones a personas o propiedades, siga las pautas a continuación para un uso e instalación seguros.

*El cable flexible externo o cordón de esta lámpara no puede ser reemplazado. Si el cordón está dañado, la

LISTA DE PIEZAS Y HERRAMIENTAS


PIEZA	DESCRIPCIÓN	IMAGEN	CANTIDAD	PIEZA	DESCRIPCIÓN	IMAGEN	CANTIDAD
A	Tornillo para máquina		2X	G	Bola roscada		2X
B	Tornillo de montaje		2X	H	Portalámparas		1X
C	Soporte de montaje		1X	I	Bombilla		6X
D	Tornillo de puesta a tierra		1X	J	Pantalla de vidrio		6X
E	Conector para cables		3X				

JY
JONATHAN Y

Modelo# : JYL3560

Dimensiones del producto: 40"L x7.5"W x 9.25"H

Dimensiones del producto: 101.6 x 19.1x23.5 CM

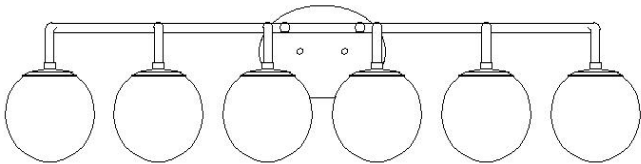

PREPARACIÓN

Antes de comenzar el ensamblaje del producto, asegúrese de que todas las partes estén presentes. Compare las partes con la lista de contenido del paquete y la lista de herramientas. Si falta alguna parte o está dañada, no intente ensamblar el producto.


Tiempo estimado de ensamblaje: 25 minutos.

Número de personas requeridas para el montaje del producto: 1 persona.

Si tiene alguna pregunta relacionada con defectos, piezas faltantes, problemas de ensamblaje, reemplazos o problemas de conectividad del dispositivo, envíe un correo electrónico detallado a cs@jonathany.com.

- 1.Fije el soporte de montaje (C) a la caja de conexión utilizando el tornillo para máquina (A)..
2. Realice las conexiones de cables utilizando los conectores (E), siguiendo el diagrama de referencia indicado a continuación..

Conectar, Caliente, Cable de Suministro de Salida Negro o Rojo a:	Conectar, Neutro, Cable de Suministro de Salida Blanco a:
Negro	Blanco
* Cable Paralelo (redondo y liso)	* Cable Paralelo (cuadrado y acanalado)
Transparente, Marrón, Dorado o Negro sin Tracer (rayas de color)	Transparente, Marrón, Dorado o Negro con Tracer (rayas de color)
Cable Aislado (no verde) con conductor de metal de cobre	Cable Aislado (no verde) con conductor de metal de plata




*NOTA: Cuando se use cable paralelo (SPT I y SPT II), el cable neutro tendrá forma cuadrada y con crestas, y el cable de corriente será redondo y liso.

Instrucciones de Conexión a Tierra:

- a) Para instalación en Estados Unidos: Enrolle el cable de tierra de la caja de conexión alrededor del tornillo verde de tornillo de tierra (D) del soporte de montaje, a no menos de 5 cm del extremo del cable. Apriete el tornillo de tierra. Si la luminaria incluye un cable de tierra, conéctelo al cable de tierra del tomacorriente mediante un conector para cables.
- b) Para instalación en Canadá: Si la luminaria incluye cable a tierra, enrolle el cable de tierra alrededor del tornillo verde de conexión a tierra en el soporte de montaje. Apriete firmemente el tornillo de tierra.

- 3.Orienta la placa posterior (F) de modo que los tornillos (B) sobresalientes del soporte de montaje se inserten en los orificios de la placa posterior, luego fíjela con las esferas roscadas (G) suministradas..
4. Instale las bombillas (I). Asegúrese de utilizar bombillas con una potencia que no exceda la especificada en este dispositivo. Siempre asegúrese de cortar la corriente eléctrica antes de cambiar las bombillas..
- 5.Coloque la pantalla de vidrio (J) sobre el portalámparas (H)

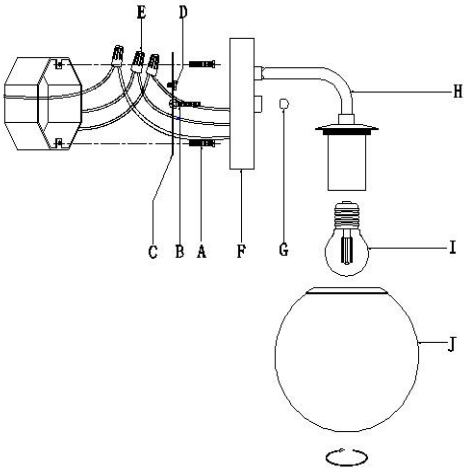

PLEAUSE ÚNICAMENTE BOMBILLAS TIPO 'A' DE MÁXIMO 25 VATIOS, O BOMBILLAS LED DE 5 VATIOS. EL PAQUETE INCLUYE 6 BOMBILLAS LED DE 4 VATIOS.

DISFRUTE DE SU LÁMPARA