
THE METAL FRAME

Owners Manual & Assembly Instructions

14-inch Metal Platform Base

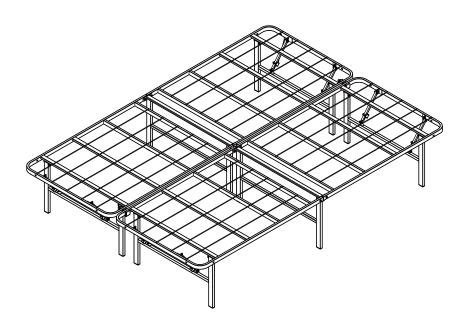

BEFORE YOU GET STARTED

IMPORTANT NOTE

Please carefully take all of the parts out of the box and lay them on a flat surface to verify that you have all of the parts. Two people are recommended for handling and maneuvering the package to its final location and for assembly.

WARNING

Please handle with care! The maximum total weight capacity is 600 lbs. for Twin/Twin XL and 1,200 lbs. for Full/Queen/King/Cal King. These capacities may not be exceeded. Exceeding load weight capacity may result in collapse and possible injury. Weight capacity limit based on even weight distribution across platform. Significant weight concentrated in a small area (foot of the bed for example) could cause platform to tip, become uneven, or unstable.











Twin, Twin XL x1 Full, Queen, King and Cal King x2

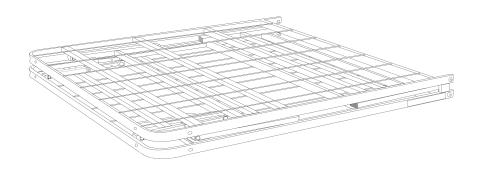



Frame Connector


Only available for Full, Queen, King and Cal King x2





Unfold (A)


CAUTION: Use caution around these points, keep body parts away from folding/unfolding mechanism.

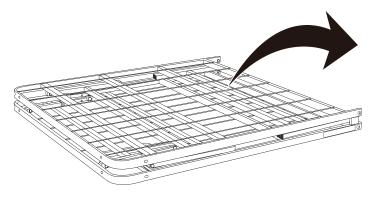

* Twin and Twin XL have only one base *


2

Unfold the legs until you hear a click Push to fold

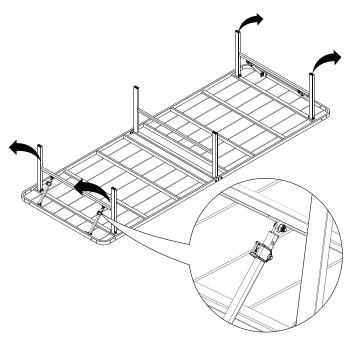

3

Flip frame upright

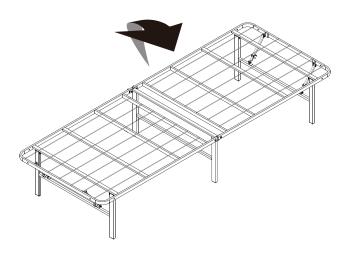

4

Connect frames with Frame Connector (B)

- *Not required for Twin and Twin XL*
- *To disassemble and store reverse all previous steps*
- *Align frame connector with frame holes as illustrated. Pass hand-bolt through the holes from the non-threaded side into the threaded side of the frame connector. Tighten snugly by hand. Periodically check frame connector bolt for snugness. Incorrect assembly of frame connector may cause platform to become unstable or separate.*

