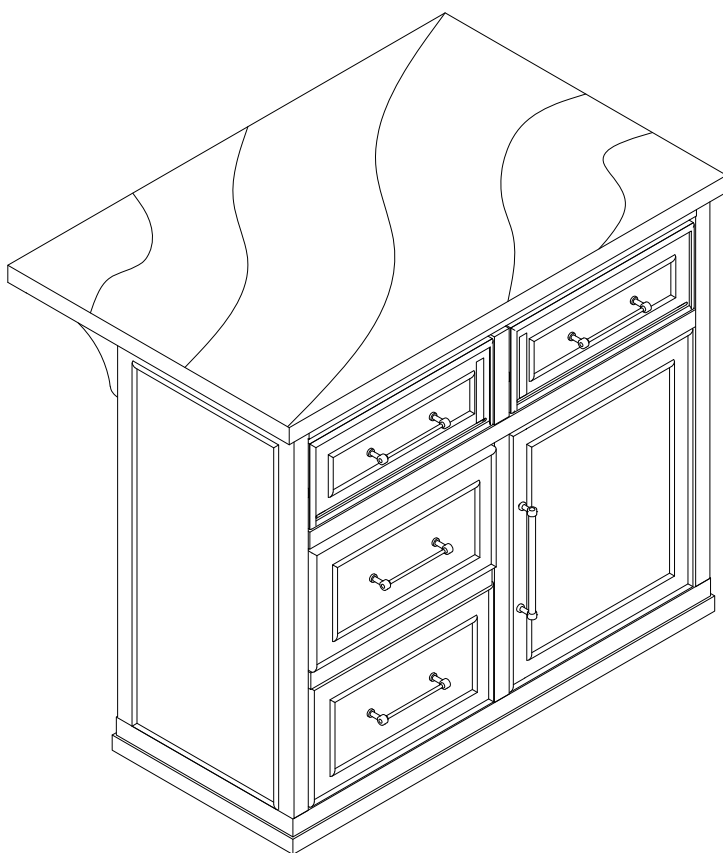
























CROSLEY

F U R N I T U R E






Faux Marble Top Kitchen Island CF3044



PART LIST


A 	B 	C 	D 	E 
Top Panel 1 PC	Bottom Panel 1 PC	Partition Panel 1 PC	Right Panel 1 PC	Left Panel 1 PC
F 	G 	H 	I 	J 
Upper Back Panel 1 PC	Lower Back Panel 2 PCS	Door 1 PC	Lower Drawer Front Panel 2 PCS	Lower Drawer Left Panel 2 PCS
K 	L 	M 	N 	O 
Lower Drawer Right Panel 2 PCS	Lower Drawer Back Panel 2 PCS	Drawer Bottom Panel 4 PCS	Upper Drawer Front Panel 2 PCS	Upper Drawer Left Panel 2 PCS
P 	Q 	R 	S 	T 
Upper Drawer Right Panel 2 PCS	Upper Drawer Back Panel 2 PCS	Adjustable Shelf 1 PC	Middle Rail 1 PC	Upper Rail 1 PC
U 	V 			
Lower Rail 1 PC	Support Panel 2 PCS			

HARDWARE LIST

#1		#2		#3		#4		#5	
	Ø1/4"x25mm		Ø8*30mm		L170mm		L230mm		Ø4*19mm
	Bolt 41 PCS (Extra 1)		Wood Dowel 26 PCS (Extra 1)		Drawer Handle 4 PCS		Door Handle 1 PC		Round Head Bolt 10 PCS (Extra 1)
#6		#7		#8		#9		#10	
	Magnet 2 PCS		Short Screw 4 PCS (Extra 1)		Long Screw 32 PCS (Extra 1)		Shelf Holder 4 PCS (Extra 1)		Allen Wrench 1 PC

ADDITIONAL TOOLS (Not Provided)


Note: It is not recommended to use power tools during assembly.




Phillips Head Screwdriver

Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.

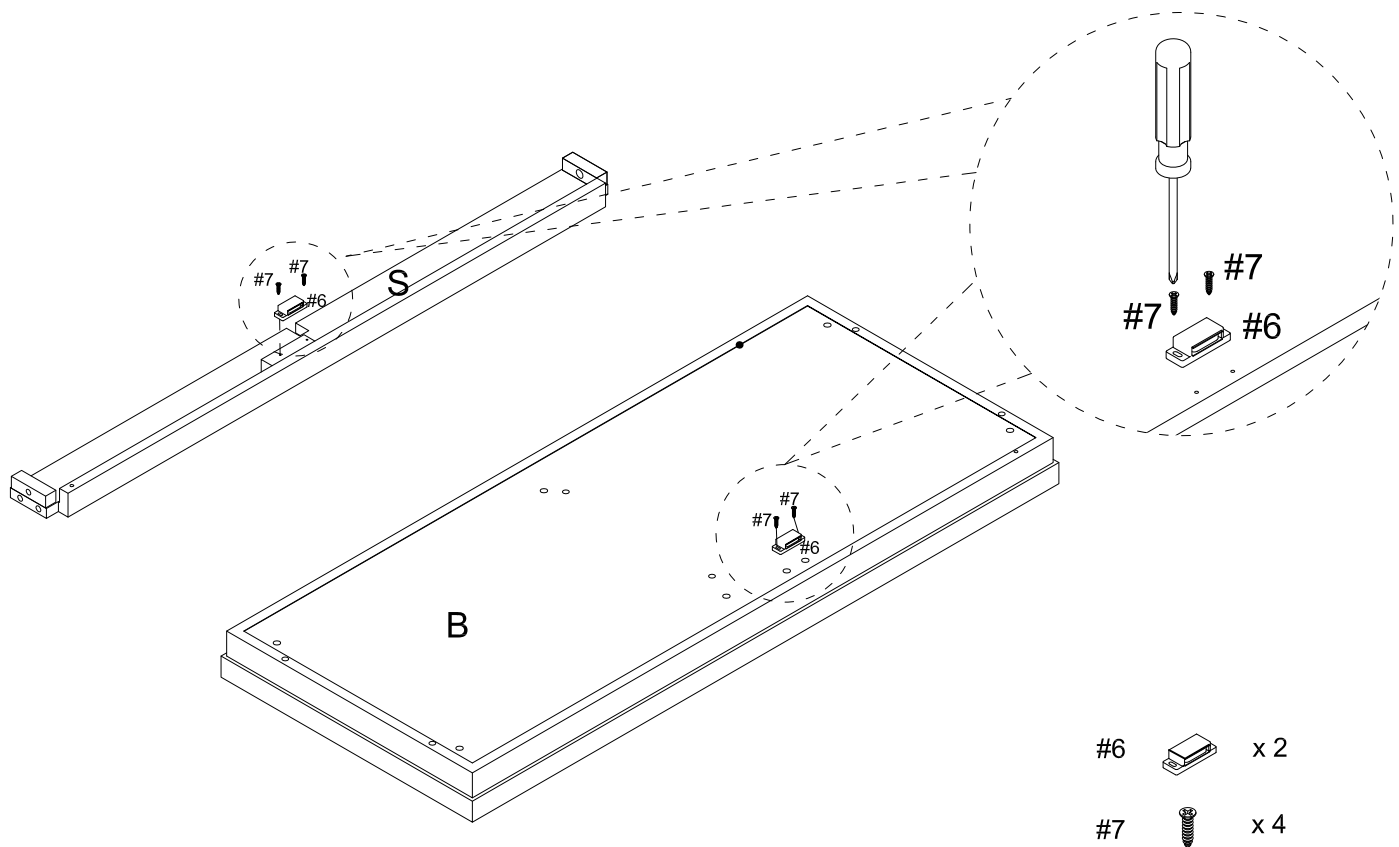
Step 1. Attach magnets (part #6) to bottom panel (part B) and middle rail (part S) using short screws (part #7) and phillips head screwdriver.



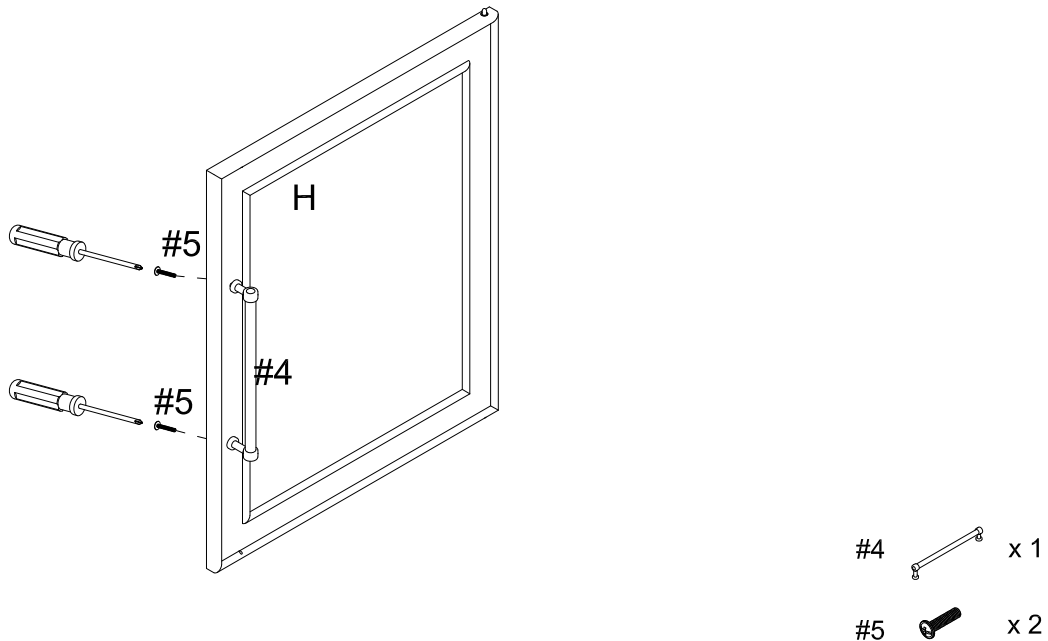
Step 2. Attach door handle (part #4) to door (part H) using round head bolts (part #5) and phillips head screwdriver.



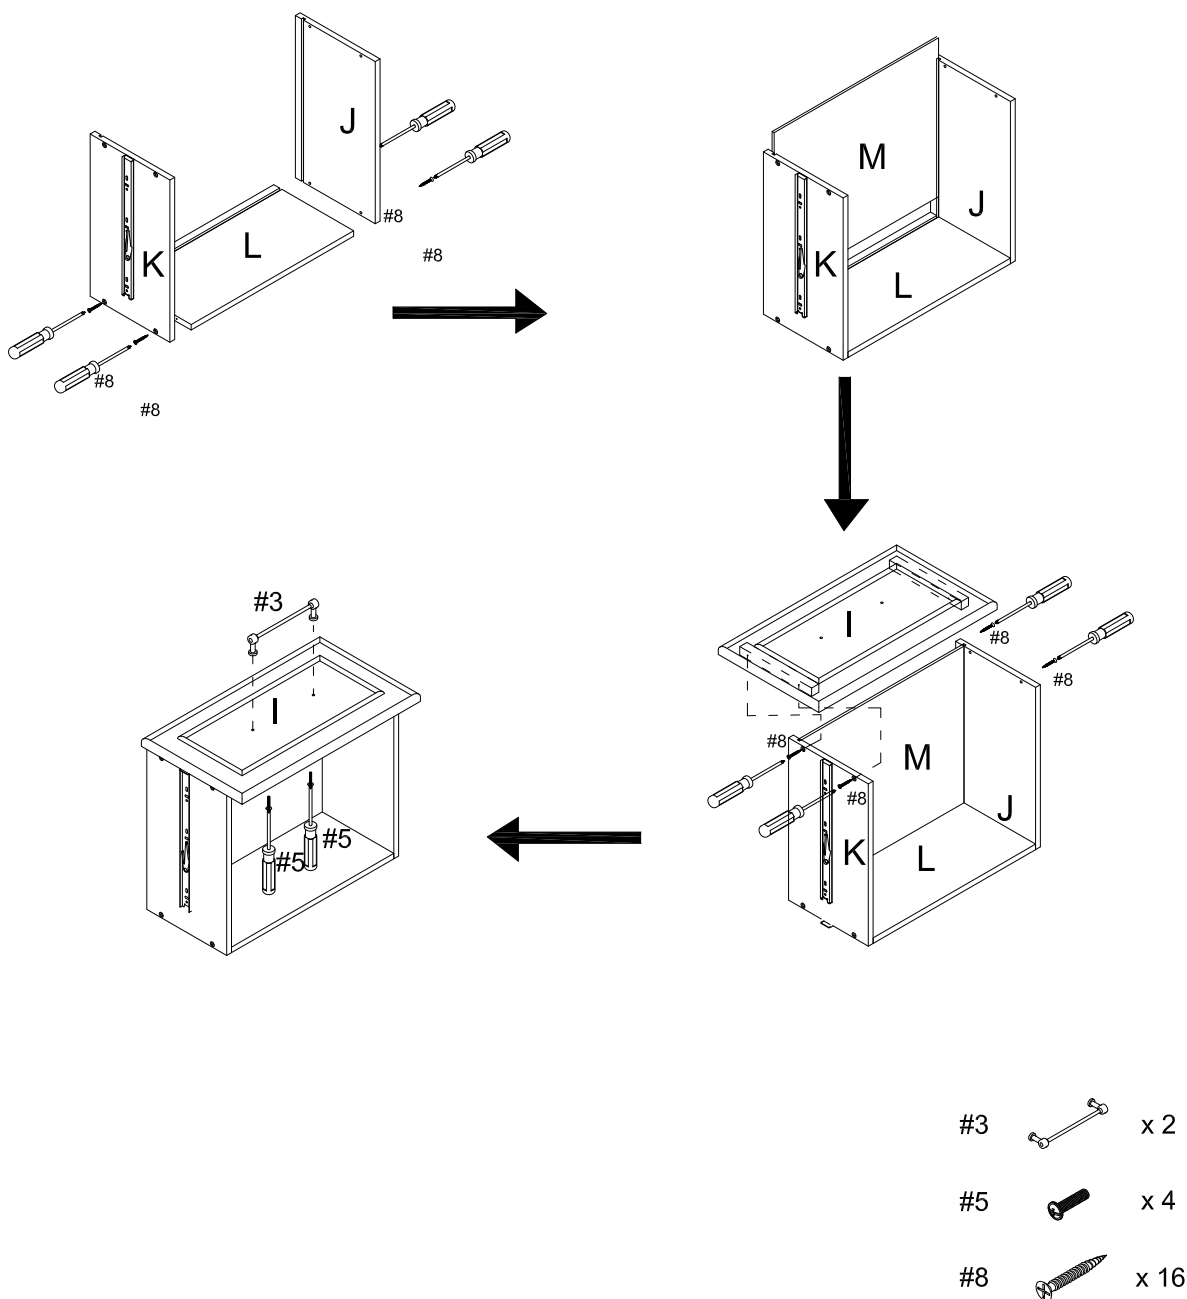Step 3. Attach lower drawer panels (parts J & K) to lower drawer back panel (part L) using long screws (part #8) and phillips head screwdriver. Slide drawer bottom panel (part M) to assembled unit (parts J, K & L). Attach lower drawer front panel (part I) to assembled unit (parts J, K & M) using long screws (part #8) and phillips head screwdriver. Attach drawer handle (part #3) to lower drawer front panel (part I) using round head bolts (part #5) and phillips head screwdriver. Repeat for remaining drawer.




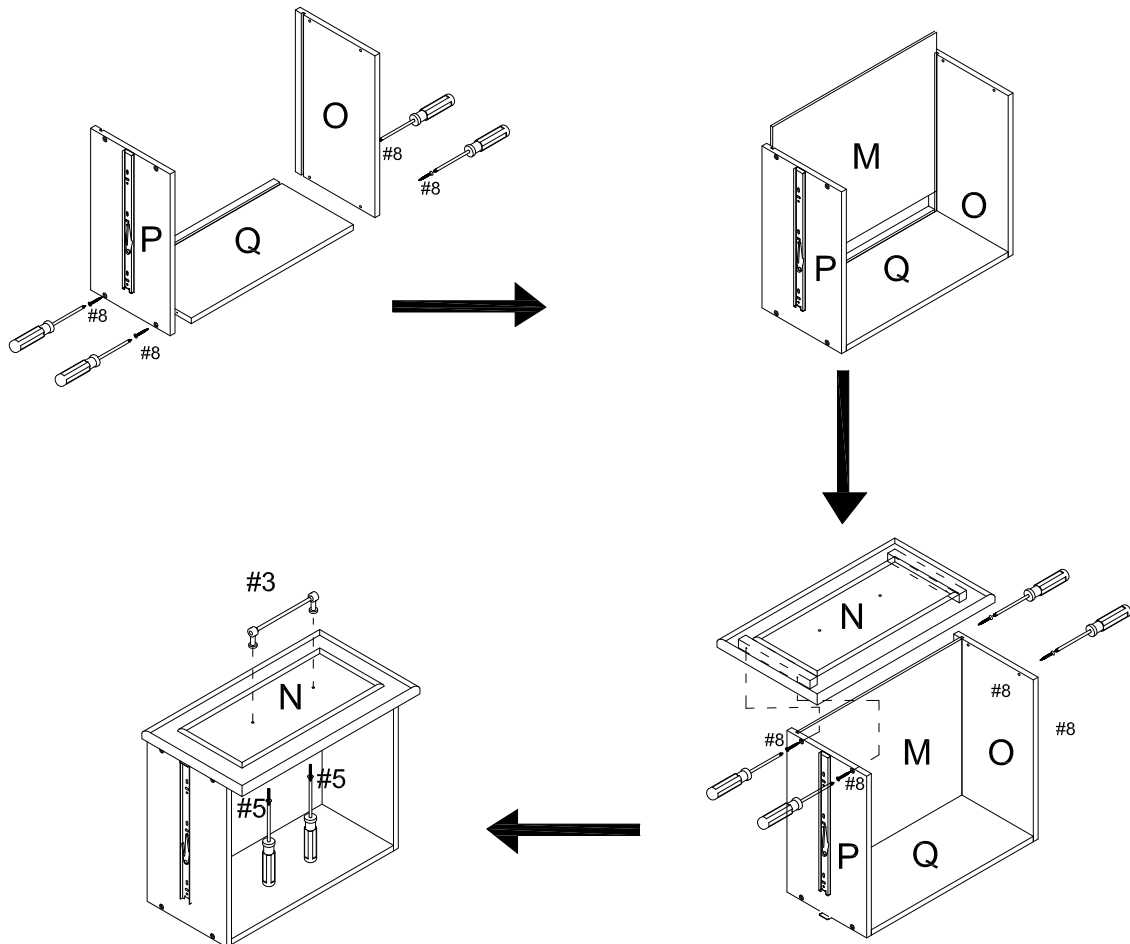Step 4. Attach upper drawer panels (parts O & P) to upper drawer back panel (part Q) using long screws (part #8) and phillips head screwdriver. Slide drawer bottom panel (part M) to assembled unit (parts O, P & Q). Attach upper drawer front panel (part N) to assembled unit (parts M, O & P) using long screws (part #8) and phillips head screwdriver. Attach drawer handle (part #3) to upper drawer front panel (part N) using round head bolts (part #5) and phillips head screwdriver. Repeat for remaining drawer.




- | | | |
|----|---|------|
| #3 |  | x 2 |
| #5 |  | x 4 |
| #8 |  | x 16 |

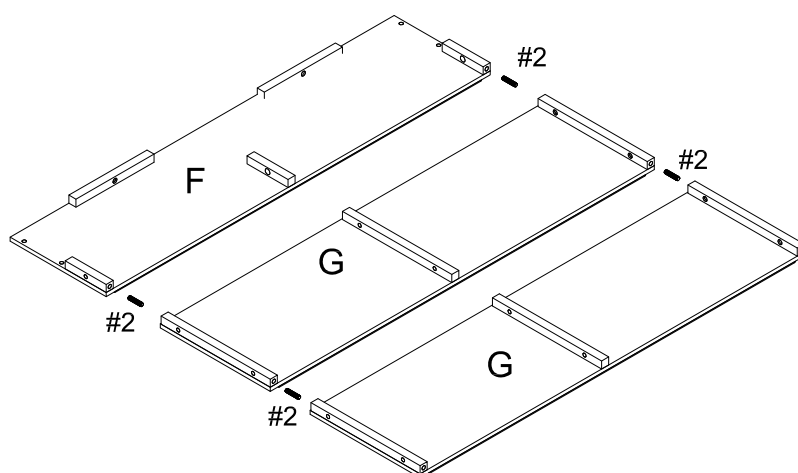Step 5. Attach upper back panel (part F) to lower back panels (part G) using wood dowels (part #2).



#2  x 4

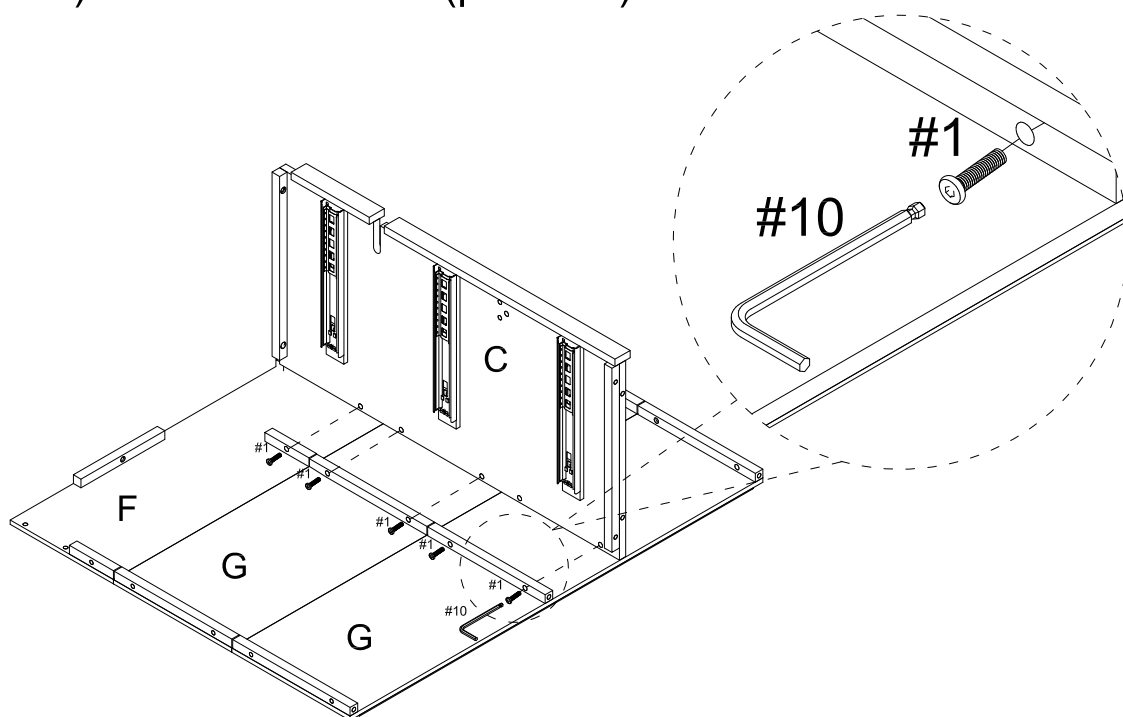
Step 6. Attach partition panel (part C) to assembled unit (parts F & G) using bolts (part #1) and allen wrench (part #10).



#1  x 5


#10  x 1

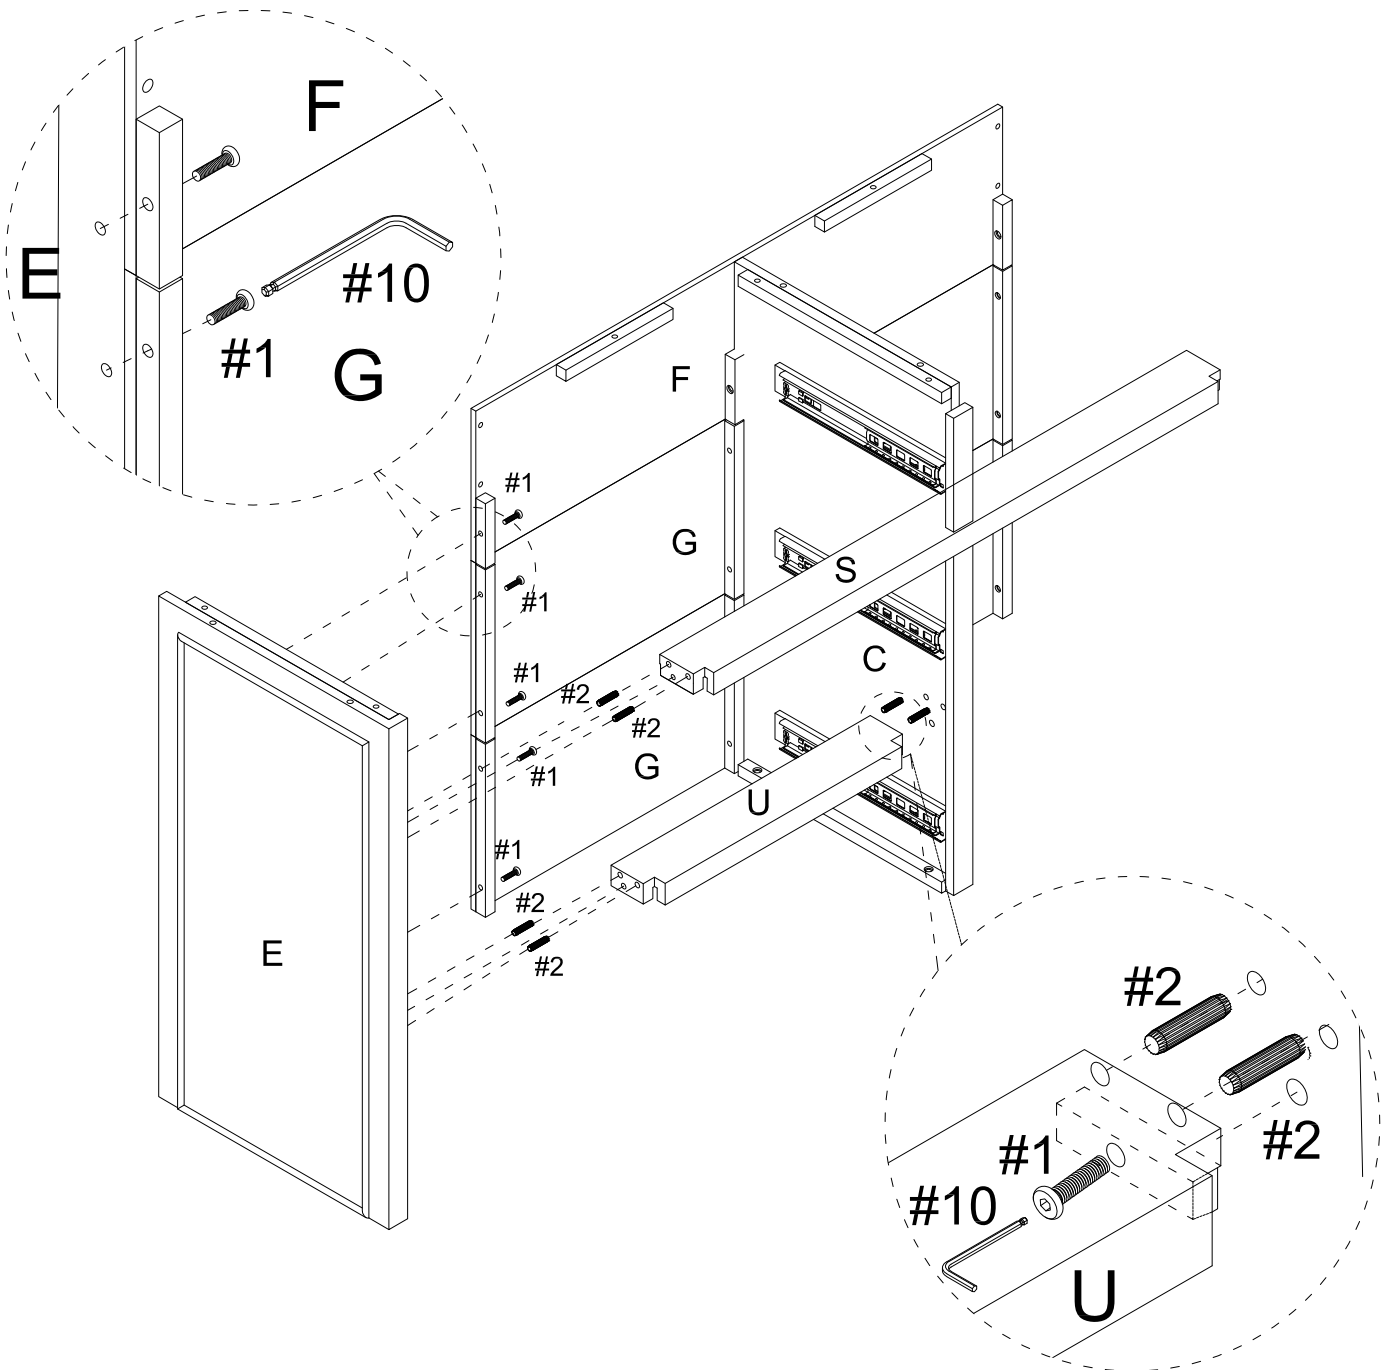Step 7. Carefully turn the assembled parts upright. Attach rails (parts S & U) and left panel (part E) to assembled parts (part C, F & G) using wood dowels (part #2), bolts (part #1) and allen wrench (part #10).




- | | | |
|-----|---|-----|
| #1 |  | x 8 |
| #2 |  | x 6 |
| #10 |  | x 1 |

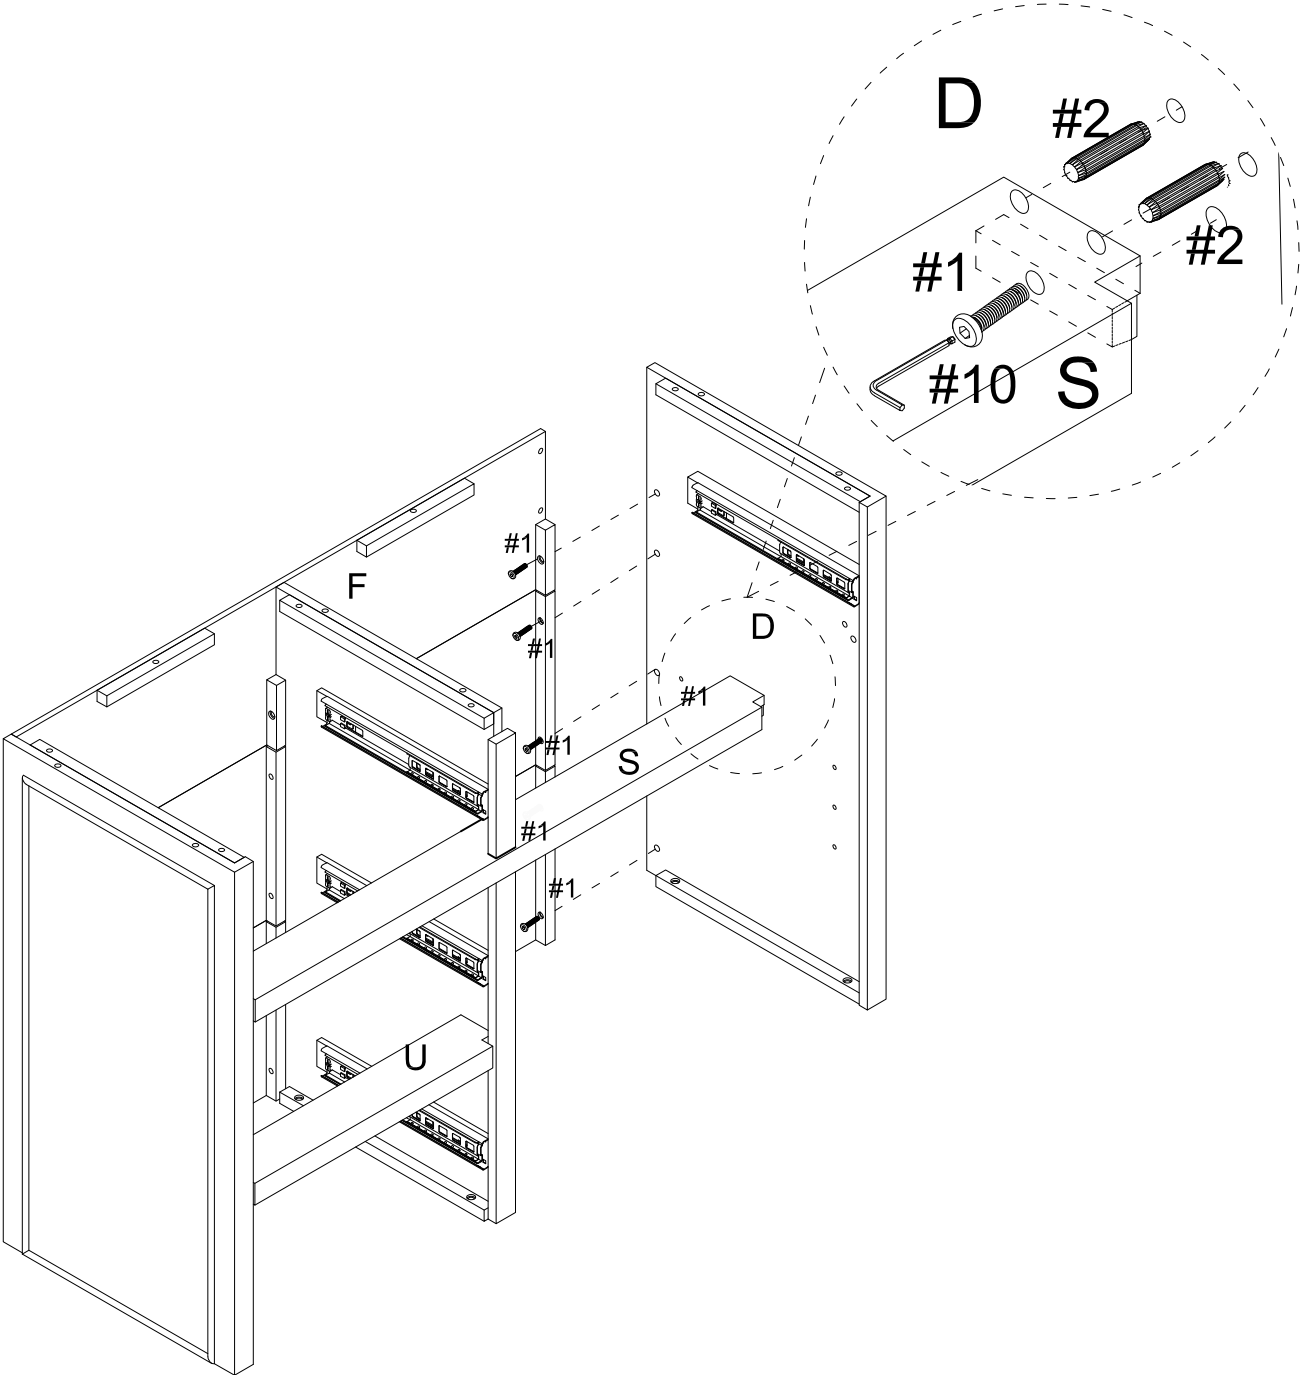Step 8. Attach right panel (part D) to assembled unit (parts F, G & S) using bolts (part #1), wood dowels (part #2) and allen wrench (part #10).




- | | | |
|-----|---|-----|
| #1 |  | x 6 |
| #2 |  | x 2 |
| #10 |  | x 1 |

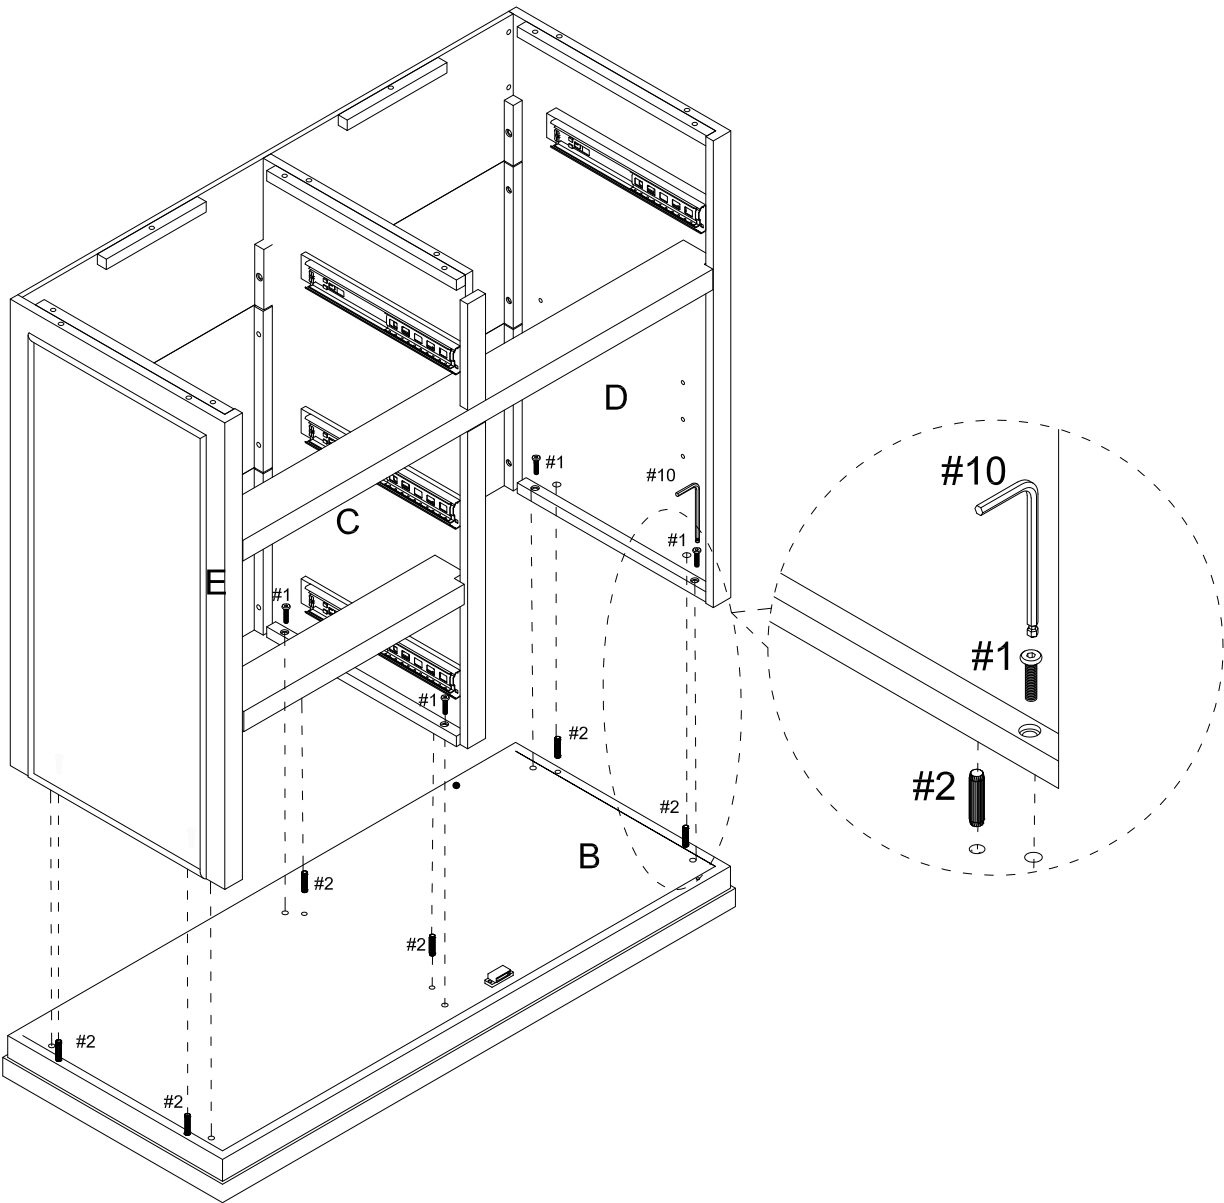Step 9. Attach assembled unit (parts C, D & E) to bottom panel (part B) using bolts (part #1), wood dowels (part #2) and allen wrench (part #10).




- | | | |
|-----|---|-----|
| #1 |  | x 6 |
| #2 |  | x 6 |
| #10 |  | x 1 |

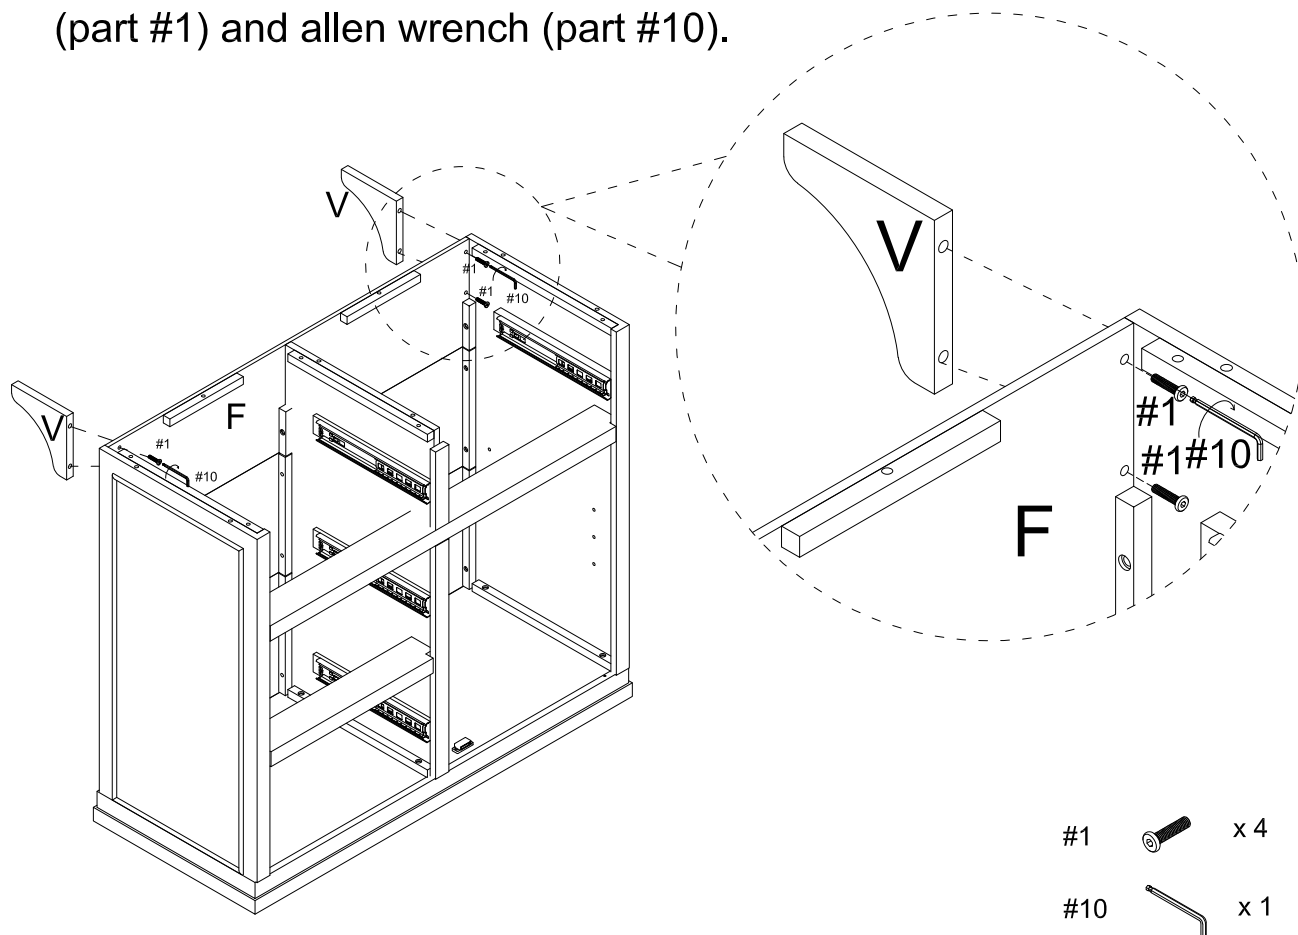
Step 10. Attach support panels (part V) to upper back panel (part F) using bolts (part #1) and allen wrench (part #10).



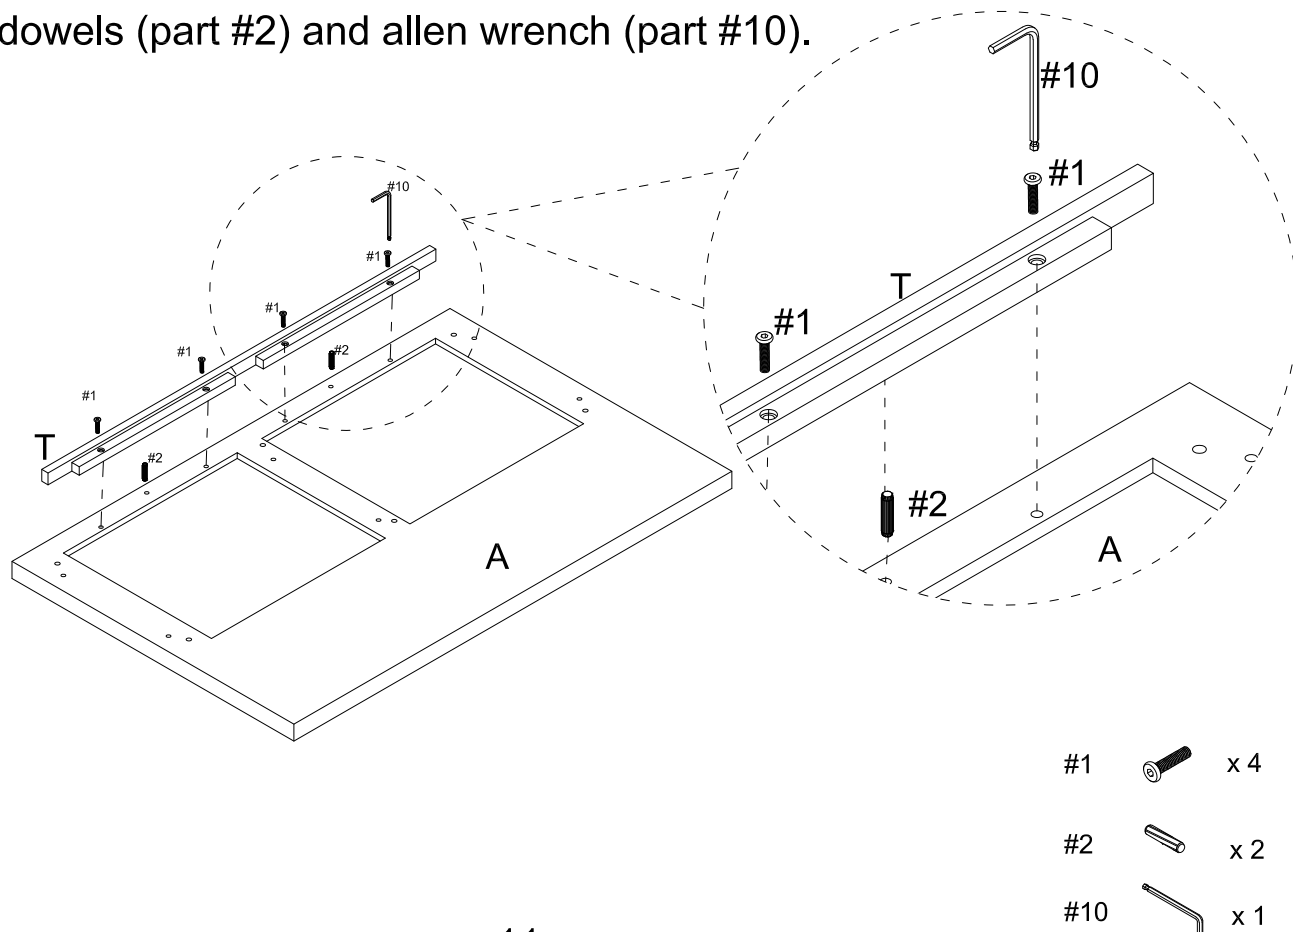
Step 11. Attach upper rail (part T) to top panel (part A) using bolts (part #1), wood dowels (part #2) and allen wrench (part #10).



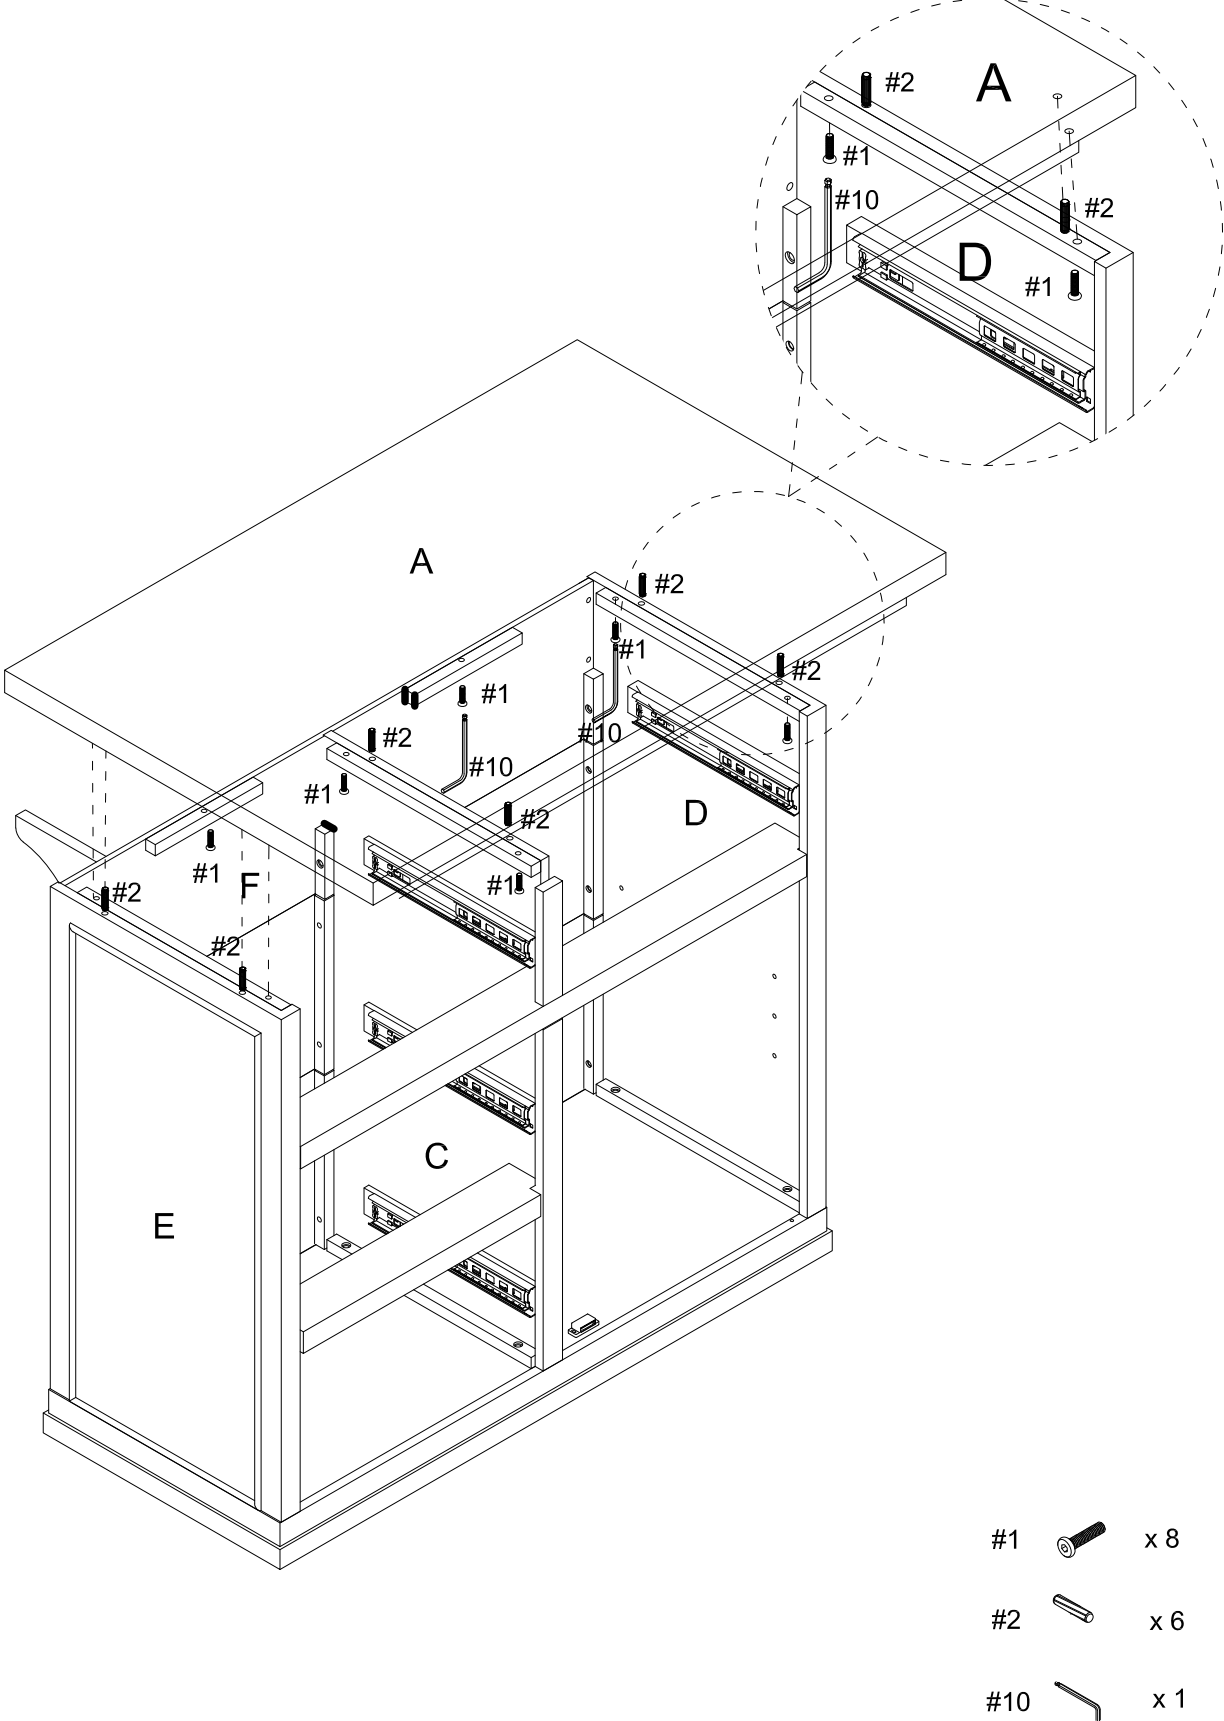Step 12. Attach top panel (part A) to assembled unit (parts C, D, E & F) using bolts (part #1), wood dowels (part #2) and allen wrench (part #10).



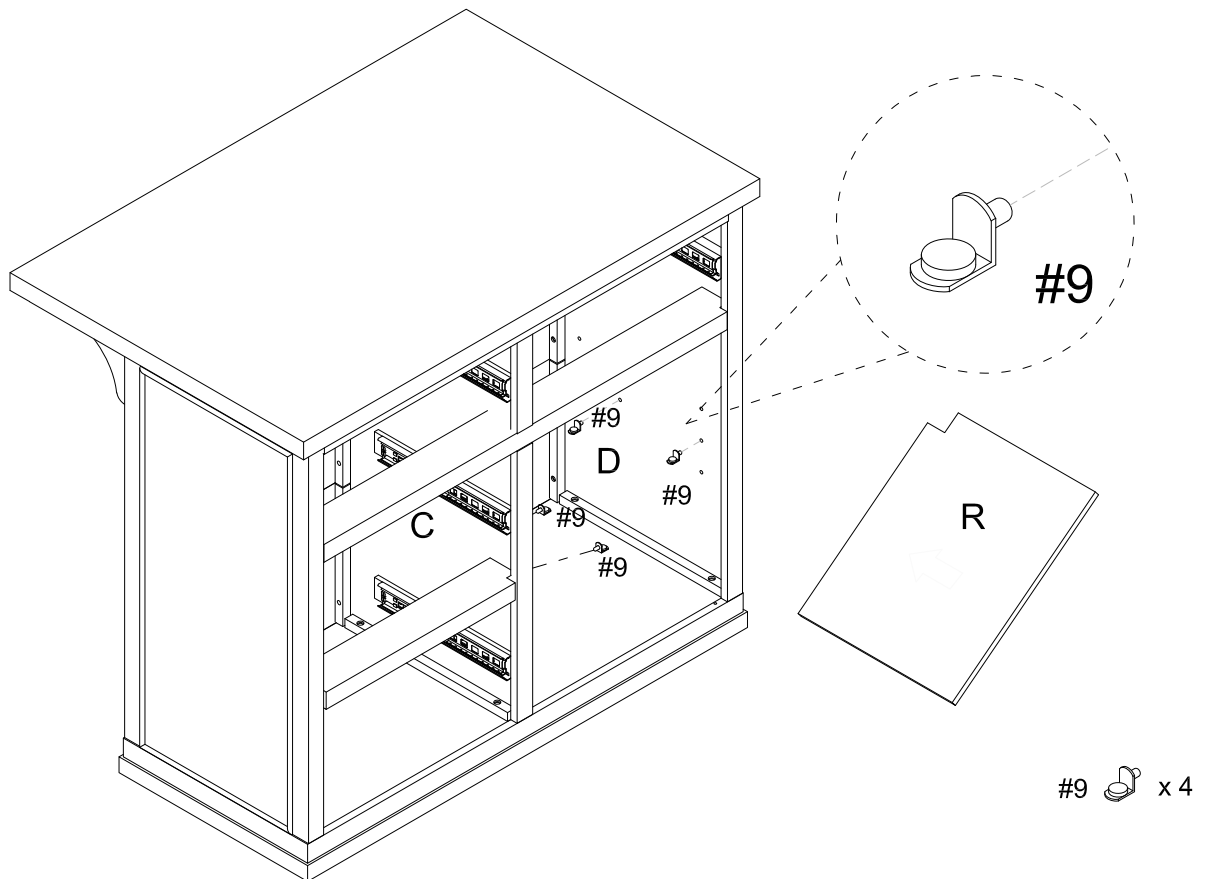Step 13. Place shelf holders (part #9) into desired position and slide adjustable shelf (part R) into place.




Step 14. Attach door (part H) by placing bottom pin hinge (pre-installed in door) in the pre-drilled hole of bottom panel (part B). Then depress the top spring-loaded pin hinge so it can be placed in the pre-drilled hole of fixed shelf (part S).

Note: Be sure top and bottom pin hinges are fully extended to secure door in place.


Note: It is important to adjust levelers once fully assembled and upright. Extend adjustable leveler until it's firmly in contact with the floor.

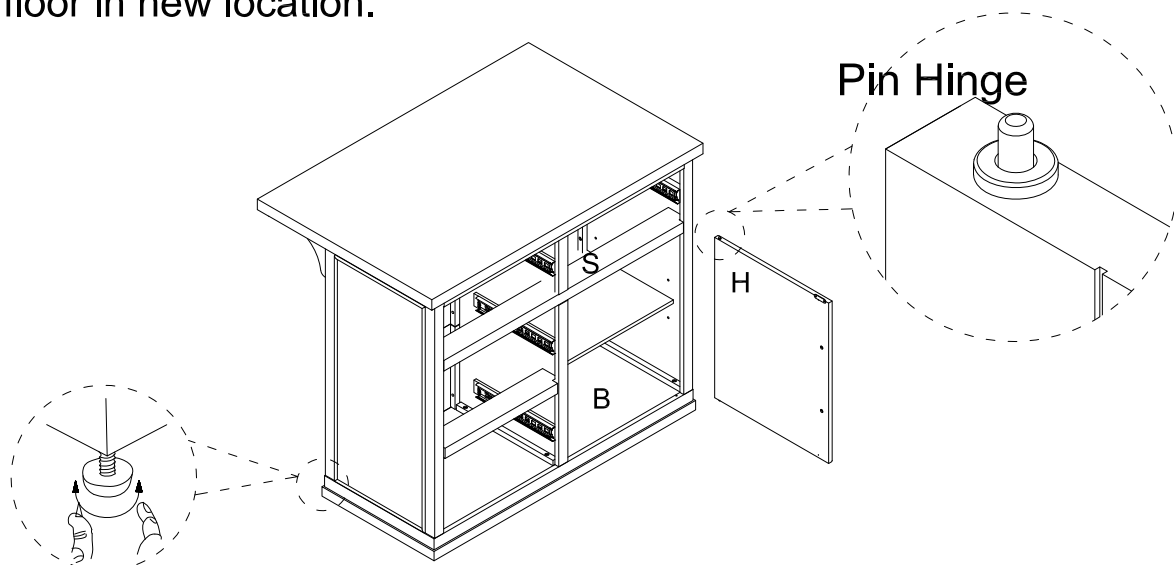If relocating, adjust leveler as needed until it's firmly in contact with the floor in new location.



Step 15. Slide assembled drawers into place.

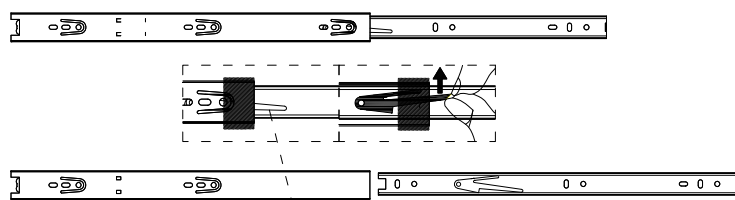Note: To release trigger disconnect levers push one side up and the other down.



Trigger Disconnect Lever

Move the sliders to the front end of rail before sliding the drawer into place.

